

## DESCRIPTION

**NOTE:** The price listed below is for 1 meter.  
 The item is sold in 5 meters reel, so the minimum order is 5 meters.  
 Please insert 5 units into the shopping cart, or multiples of this value.



Brilumen's Professional LED Strip is the brand's star and it stands out for its reliability, versatility and light quality, being considered the best LED strip on the market. With different wattages, luminous fluxes and widths, this 24V LED strip is available in the colour temperature from 2500K to 6500K, can have 30, 60, 120, 160 and 280 LED and a CRI higher than 80. Due to the double-sided adhesive tape on the back, this product, besides being quite flexible, is easy to install and, depending on the model, is available with IP20 or IP67. To extend its operating cycle, it is recommended to install this LED strip in the right aluminium profile. When used properly, this high-quality LED strip for professional use, can be turned on 24 hours a day for 3 years without losing its features, and is highly recommended in numerous projects such as hotels, restaurants, shops, residences, etc. If the goal is to install a reliable, quality and easy to install product, Brilumen's Professional LED strip is undoubtedly the perfect choice.

MOUNTING TYPE	Surface
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	12V /
WARRANTY	2 Years
CONTROL	SMD2835


## LED FEATURES

LUMINOUS EFFICIENCY	UP TO 95 lm/W
CRI	CRI→80

## ICONOGRAPHY

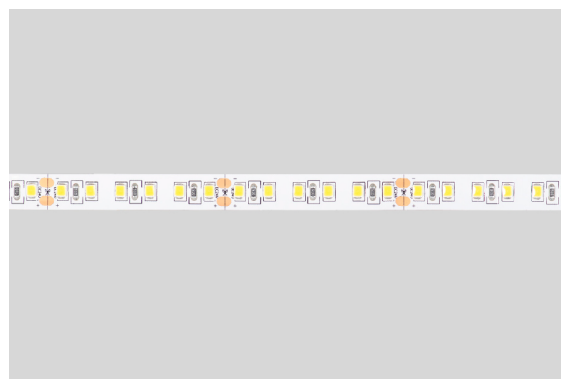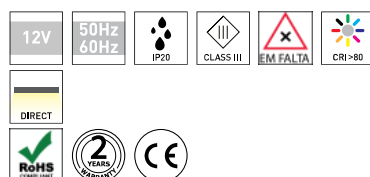

## TECHNICAL DRAWING



**2002-116 ECO 14,4W 120LED**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - ECO SMD2835 14,4W 120 LED IP20**

POWER	VOLTAGE	COLOR TEMP.	RATED LUMINOUS FLUX/M	LED EFFICIENCY	UN.	CODE
12	12V	2700K	1044	87	5MT	2002-116.80.27
12	12V	4200K	1080	90	5MT	2002-116.80.42
12	12V	6500K	1140	95	5MT	2002-116.80.65

## ACCESSORIES



Trix aluminium profile	
Trix aluminium profile	8010-2002.AL



IP20 LED Strip Connector	
IP20 LED Strip Connector	8013-0014



Connector w/ binder 15cm	
Connector w/ binder 15cm	8013-0015



Double c/t w/ binder	
Double c/t w/ binder	8013-0016



L connector	
L connector	8013-0017



12,5 mm Connector	8013-0026
-------------------	-----------



OP23 Corner Profile	SEM TITULO - G810-4052
---------------------	---------------------------



LP05 aluminium profile	SEM TITULO - G810-5201
------------------------	---------------------------




LP03 Recessed Profile	SEM TITULO - G810-6032
-----------------------	---------------------------



LP08 Recessed Profile	SEM TITULO - G810-6082
-----------------------	---------------------------



LP10 aluminium profile	SEM TITULO - G810-7012
------------------------	---------------------------



NP04 aluminium profile	SEM TITULO - G820-1012
------------------------	---------------------------



NP06 aluminium profile	SEM TITULO - G830-1017
------------------------	---------------------------



NP07 Recessed Profile	SEM TITULO - G830-5015
-----------------------	---------------------------



NP17 aluminium profile	SEM TITULO - G810-2026
------------------------	---------------------------



FP02 Edging Tile Profile	SEM TITULO - G810-2034
--------------------------	---------------------------



OP15 aluminium profile	SEM TITULO - G810-2062
------------------------	---------------------------



LP06 aluminium profile	SEM TITULO - G810-6062
------------------------	---------------------------