



DESCRIPTION

The Wall Recessed range (Eliot & Frost) consists on a set of luminaires suitable for halls, stairs or other lighting purposes near to the mopbard. These products, which may have 1W (Eliot) or 4W (Frost), have a high IP rating and asymmetric beam angles, technical features needed in this type of light fitting. With a brushed aluminium, or white textured finish, and a CRI higher than 85, this product range (Eliot & Frost) is available on ON-OFF or dimmable 0-10V mode and is compatible with the DALI system as an option. NOTE: This product range has 3 Volts, requiring an external drive to connect the luminaires to 230 Volts, as well as a waterproof box to preserve the products IP.


POWER SUPPLY 3VDC / 50-60 Hz

LED FEATURES

ICONOGRAPHY

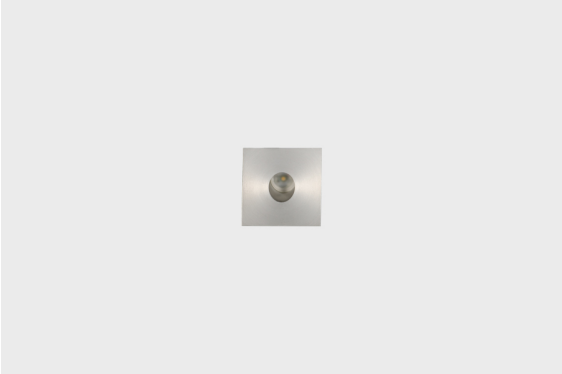

TECHNICAL DRAWING



ELIOT 1W
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→85

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
39	1	BAL	NF	60	120	50	3000K	344.85.BA.30.FI
SELECT YOUR PREFERRED OPTION			CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
			ON/OFF	NF	Brushed Aluminum	BAL	60°	60

ACCESSORIES



Waterproof box
SEM TITULO -
4080-1030



Output cable gland
SEM TITULO -
4080-1031



Cover for waterproof box
SEM TITULO -
4080-1033



LED Driver 6W 350mA
SEM TITULO -
8015-0224

LED Driver 350mA
SEM TITULO -



LED Driver 350mA

8015-0226