

DESCRIPTION

This product has been updated to a more efficient version (higher lumens with lower consumption).


Click [here](#) to access the current product.

MOUNTING TYPE	Surface
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
CONTROL	1-10V, ON/OFF

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 132 lm/W
CRI	CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	4 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

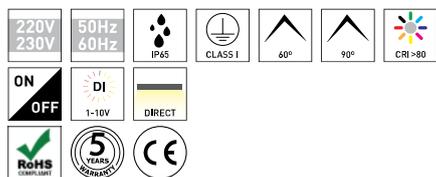

ELLINGTON 100W
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80


LENGTH	POWER	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
180	100	1V, NF	60, 90	12400	11780	4200K	289XX.BA.842
180	100	1V, NF	60, 90	13200	12540	6500K	289XX.BA.865

**SELECT YOUR PREFERRED
OPTION**

CONTROL TYPE		XX	BEAM ANGLE		BA
1-10V	ON/OFF	1V	60°	90°	60
		NF			90



TECHNICAL DRAWING



PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS Lens

