

DESCRIPTION

This product has been updated to a more efficient version (higher lumens with lower consumption).


Click [here](#) to access the current product.

| | |
|---------------------------|---------------------|
| MOUNTING TYPE | Surface |
| LIGHT DISTRIBUTION | Direct |
| POWER SUPPLY | 220-230V / 50-60 Hz |
| WARRANTY | 5 Years |
| CONTROL | 1-10V, ON/OFF |

LED FEATURES

| | |
|-----------------------------|-----------------|
| LUMINOUS EFFICIENCY | UP TO 132 lm/W |
| CRI | CRI→80 |
| LIFESPAN | 50.000 Hours |
| STEPS MACADAM | 4 Steps MacAdam |
| LUMEN MAINTENANCE | L90/B50 |
| PHOTOBIOLOGICAL RISK | RG1 |

ICONOGRAPHY

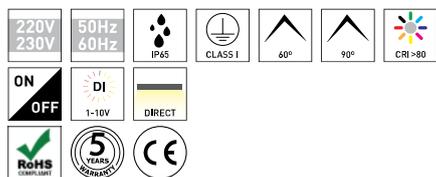

**ELLINGTON 150W
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80**


| LENGTH | POWER | CONTROL TYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE |
|--------|-------|--------------|------------|------------|--------------|-------------|--------------|
| 180 | 150 | 1V, NF | 60, 90 | 18600 | 17670 | 4200K | 290XX.BA.842 |
| 180 | 150 | 1V, NF | 60, 90 | 19800 | 18810 | 6500K | 290XX.BA.865 |

**SELECT YOUR PREFERRED
OPTION**

| CONTROL TYPE | | XX | BEAM ANGLE | | BA |
|--------------|--------|----|------------|-----|----|
| 1-10V | ON/OFF | 1V | 60° | 90° | 60 |
| | | NF | | | 90 |



TECHNICAL DRAWING

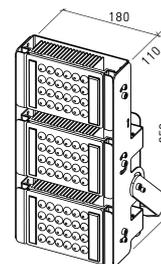

PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS Lens

