

DESCRIPTION


The growing need to find a powerful and versatile luminaire that can serve as a floodlight or as an industrial light fitting, led Brilumen to present an efficient solution that meets these two requirements, the ELLINGTON product range. These floodlights can light up building facades, as they have an IP65, ingress protection rating suitable for outdoor areas, and can be installed on the floor or the wall.

MOUNTING TYPE	Surface
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
CONTROL	1-10V, DALI, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 175 lm/W
CRI	CRI>80
LIFESPAN	50.000 Hours
STEPS MACADAM	4 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

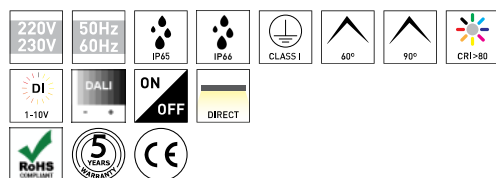

TECHNICAL DRAWING

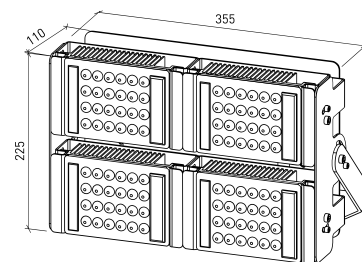

ELLINGTON 160W  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI>80

LENGTH	POWER	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
355	160	1V, DL, NF	60, 90	22400	21280	6500K	491XX.BA.865
355	160	1V, DL, NF	60, 90	28000	26600	4000K	491XX.BA.840

SELECT YOUR PREFERRED  
OPTION

CONTROL TYPE		BEAM ANGLE	
XX		BA	
1V	1V	60°	60
DALI	DL	90°	90
ON/OFF	NF		