

DESCRIPTION

This product has been updated to a more efficient version (higher lumens with lower consumption).

Click [here](#) to access the current product.


MOUNTING	Surface
LIGHT DISTRIBUTION	Directa
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
CONTROL	1-10V, ON/OFF

LED FEATURES


LUMINOUS EFFICIENCY	UP TO 132 lm/W
CRI	CRI->80
LIFESPAN	50.000 Hours
STEPS MACADAM	4 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1



TECHNICAL DRAWING

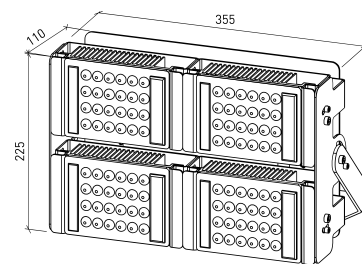

ICONOGRAPHY

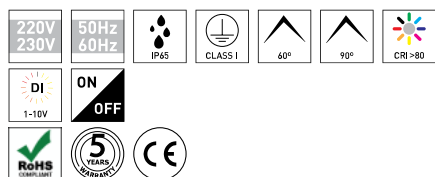

**ELLINGTON 200W
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->80**

LENGTH	POWER	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
355	200	1V, NF	60, 90	24800	23560	4200K	291XX.BA.842
355	200	1V, NF	60, 90	26400	25080	6500K	291XX.BA.865

**SELECT YOUR PREFERRED
OPTION**

CONTROLTYPE	XX	BEAM ANGLE	BA
1-10V	1V	60°	60
ON/OFF	NF	90°	90

PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS Lens

