

**DESCRIPTION**

This product has been updated to a more efficient version (higher lumens with lower consumption).

Click [here](#) to access the current product.


<b>MOUNTING TYPE</b>	Surface
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>CONTROL</b>	1-10V, ON/OFF

**LED FEATURES**


<b>LUMINOUS EFFICIENCY</b>	UP TO 132 lm/W
<b>CRI</b>	CRI→80
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	4 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1



**TECHNICAL DRAWING**

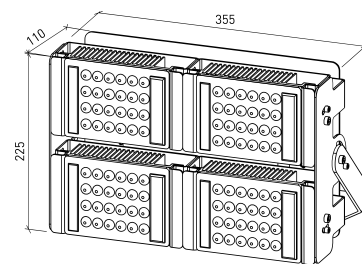

**ICONOGRAPHY**

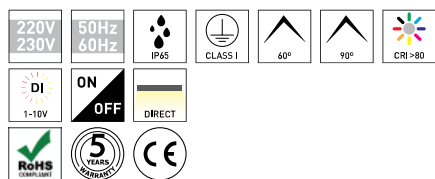

**ELLINGTON 200W  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80**

LENGTH	POWER	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
355	200	1V, NF	60, 90	24800	23560	4200K	291XX.BA.842
355	200	1V, NF	60, 90	26400	25080	6500K	291XX.BA.865

**SELECT YOUR PREFERRED  
OPTION**

CONTROL TYPE		XX	BEAM ANGLE		BA
1-10V	ON/OFF	1V	60°	90°	60
		NF			90

PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS Lens

