

**DESCRIPTION**

The growing need to find a powerful and versatile luminaire that can serve as a floodlight or as an industrial light fitting, led Brilumen to present an efficient solution that meets these two requirements, the ELLINGTON product range. These floodlights can light up building facades, as they have an IP65, ingress protection rating suitable for outdoor areas, and can be installed on the floor or the wall.


MOUNTING	Surface
LIGHT DISTRIBUTION	Directa
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
CONTROL	1-10V, DALI, ON/OFF

**LED FEATURES**


LUMINOUS EFFICIENCY	UP TO 175 lm/W
CRI	CRI->80
LIFESPAN	50.000 Hours
STEPS MACADAM	4 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1



**TECHNICAL DRAWING**



**ICONOGRAPHY**

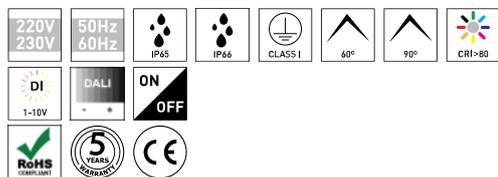

**ELLINGTON 240W  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->80**

LENGTH	POWER	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
355	240	1V, DL, NF	60, 90	33600	31920	6500K	492XX.BA.865
355	240	1V, DL, NF	60, 90	42000	39900	4000K	492XX.BA.840

SELECT YOUR PREFERRED  
OPTION

CONTROLTYPE	XX	BEAM ANGLE	BA
1-10V	1V	60°	60
DALI	DL	90°	90
ON/OFF	NF		