

**DESCRIPTION**

This product has been updated to a more efficient version (higher lumens with lower consumption).


Click [here](#) to access the current product.

<b>MOUNTING TYPE</b>	Surface
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>CONTROL</b>	1-10V, ON/OFF

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 132 lm/W
<b>CRI</b>	CRI→80
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	4 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**ICONOGRAPHY**

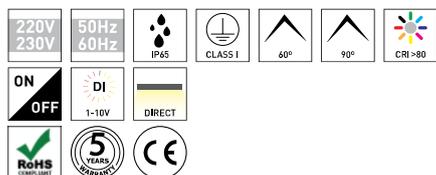

**ELLINGTON 300W  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80**


LENGTH	POWER	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
355	300	1V, NF	60, 90	37200	35340	4200K	292XX.BA.842
355	300	1V, NF	60, 90	39600	37620	6500K	292XX.BA.865

**SELECT YOUR PREFERRED  
OPTION**

CONTROL TYPE		XX	BEAM ANGLE		BA
1-10V	ON/OFF	1V	60°	90°	60 90



**TECHNICAL DRAWING**

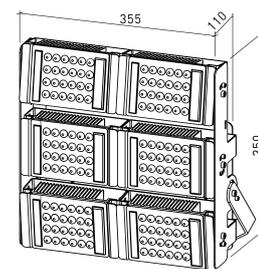

PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS Lens

