

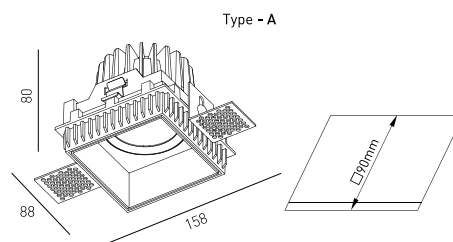
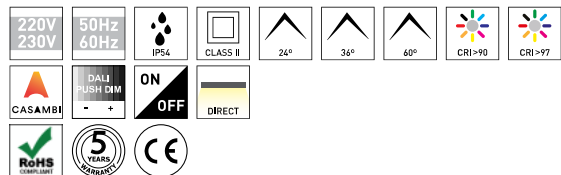
DESCRIPTION

One of the lighting trends is the trimless downlights, aluminium light fittings without trims, perfect to recess in false ceilings. Brilumen introduces you this range of products, indented or with tube, suitable for ambient lighting of any room that requires discrete luminaires which do not change the ceiling aesthetics, but at the same time are modern with advanced technology, and effectively illuminate the entire environment.

MOUNTING	Recessed
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured White
CONTROL	CASAMBI, DALI / PUSH Dim, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 161 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

ICONOGRAPHY

ERIDANE 8,1W DOWNLIGHT
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
88	8,1	TW	CS, DA, NF	24, 36, 60	1203	1023	2700K	5326XX.BA.927.FI
88	8,1	TW	CS, DA, NF	24, 36, 60	1244	1057	3000K	5326XX.BA.930.FI
88	8,1	TW	CS, DA, NF	24, 36, 60	1300	1105	4000K	5326XX.BA.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / PUSH Dim	DA			36°	36
ON/OFF	NF			60°	60

ERIDANE 8,1W DOWNLIGHT
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
88	8,8	TW	CS, DA, NF	24, 36, 60	918	780	2700K	5326XX.BA.9727.FI
88	8,8	TW	CS, DA, NF	24, 36, 60	980	833	3000K	5326XX.BA.9730.FI
88	8,8	TW	CS, DA, NF	24, 36, 60	1033	878	4000K	5326XX.BA.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / PUSH Dim	DA			36°	36
ON/OFF	NF			60°	60