

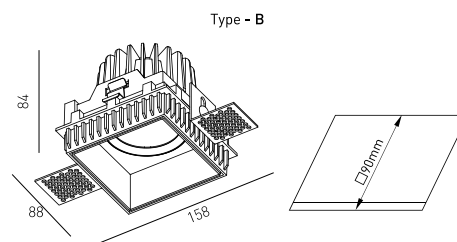
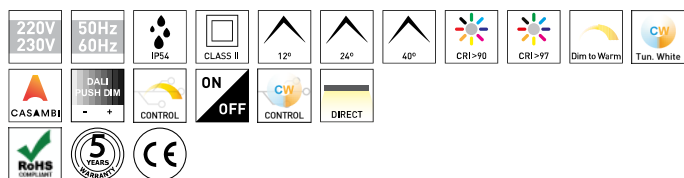
**DESCRIPTION**

One of the lighting trends is the trimless downlights, aluminium light fittings without trims, perfect to recess in false ceilings. Brilumen introduces you this range of products, indented or with tube, suitable for ambient lighting of any room that requires discrete luminaires which do not change the ceiling aesthetics, but at the same time are modern with advanced technology, and effectively illuminate the entire environment.

<b>MOUNTING</b>	Recessed
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured White
<b>CONTROL</b>	CASAMBI, DALI / PUSH Dim, Dim To Warm, ON/OFF, Tunable White


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 97 lm/W
<b>CRI</b>	CRI→90, CRI→97, Dim To Warm CRI→95, Tunable White CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**

**ERIDANE 11,4W DOWNLIGHT**  
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
88	11,4	TW	CS, DA, NF	12, 24, 40	1637	1391	2700K	5339XX.BA.927.FI
88	11,4	TW	CS, DA, NF	12, 24, 40	1671	1420	3000K	5339XX.BA.930.FI
88	11,4	TW	CS, DA, NF	12, 24, 40	1785	1518	4000K	5339XX.BA.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	12°	12
DALI / PUSH Dim	DA			24°	24
ON/OFF	NF			40°	40

**ERIDANE 11,4W DOWNLIGHT**  
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
88	12,8	TW	CS, DA, NF	12, 24, 40	1243	1056	2700K	5339XX.BA.9727.FI
88	12,8	TW	CS, DA, NF	12, 24, 40	1319	1122	3000K	5339XX.BA.9730.FI
88	12,8	TW	CS, DA, NF	12, 24, 40	1396	1187	4000K	5339XX.BA.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	12°	12
DALI / PUSH Dim	DA			24°	24
ON/OFF	NF			40°	40

**ERIDANE 11,4W DOWNLIGHT**  
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Dim To Warm CRI→95

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
88	11,8	TW	DW	12, 24, 40	1148	975	Dim to Warm 1800k - 3000k	5339XX.BA.953018.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
Dim To Warm	DW	Textured White	TW	12°	12
				24°	24
				40°	40



**ERIDANE 11,4W DOWNLIGHT**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
88	10,4	TW	TU	12, 24, 40	1159	985	TunableWhite 2700k - 6500k	5339XX.BA.92765.FI

SELECT YOUR PREFERRED  
 OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
Tunable White	TU	Textured White	TW	12°	12
				24°	24
				40°	40