



DESCRIPTION

The Wall Recessed range consists on a set of luminaires (Eliot & Frost) suitable for halls, stairs or other lighting purposes near to the mopboard. These products, which may have 1W (Eliot) or 4W (Frost), have a high IP rating and asymmetric beam angles, technical features needed in this type of light fitting. With a brushed aluminium, or white textured finish, and a CRI higher than 85, this product range (Eliot & Frost) is available on ON-OFF or dimmable 0-10V mode and is compatible with the DALI system as an option. NOTE: This product range has 3 Volts, requiring an external drive to connect the luminaires to 230 Volts, as well as a waterproof box to preserve the products IP.


POWER SUPPLY 12VDC / 50-60 Hz

LED FEATURES

ICONOGRAPHY



TECHNICAL DRAWING

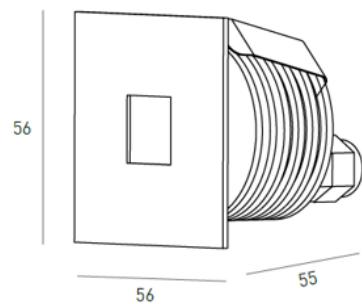

FROST 4W PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→85

| LENGTH | POWER | FINISHING | CONTROL TYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE |
|--------|-------|-----------|--------------|------------|------------|--------------|-------------|-----------------|
| 56 | 4 | TW | NF | 45 | 315 | 240 | 3000K | 346.85.BA.30.FI |

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE
ON/OFF NF

FINISHING
Textured White TW

BEAM ANGLE
45° 45

ACCESSORIES



Waterproof box SEM TITULO -
Waterproof box 4080-1030



Output cable gland SEM TITULO -
Output cable gland 4080-1031



Cover for waterproof box SEM TITULO -
Cover for waterproof box 4080-1033



LED Driver 6W 350mA SEM TITULO -
LED Driver 6W 350mA 8015-0224