


DESCRIPTION

The Wall Recessed range consists on a set of luminaires (Eliot & Frost) suitable for halls, stairs or other lighting purposes near to the mopboard. These products, which may have 1W (Eliot) or 4W (Frost), have a high IP rating and asymmetric beam angles, technical features needed in this type of light fitting. With a brushed aluminium, or white textured finish, and a CRI higher than 85, this product range (Eliot & Frost) is available on ON-OFF or dimmable 0-10V mode and is compatible with the DALI system as an option. NOTE: This product range has 3 Volts, requiring an external drive to connect the luminaires to 230 Volts, as well as a waterproof box to preserve the products IP.


POWER SUPPLY 12VDC / 50-60 Hz

LED FEATURES

ICONOGRAPHY



TECHNICAL DRAWING

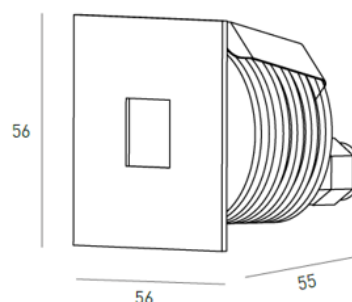

FROST 4W PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→85

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
56	4	TW	NF	45	315	240	3000K	346.85.BA.30.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX
ON/OFF	NF

FINISHING	FI
Textured White	TW

BEAM ANGLE	BA
45°	45

ACCESSORIES



Waterproof box
Waterproof box 4080-1030



Output cable gland
Output cable gland 4080-1031



Cover for waterproof box
Cover for waterproof box 4080-1033



LED Driver 6W 350mA
LED Driver 6W 350mA 8015-0224