



DESCRIPTION

The Wall Recessed range consists on a set of luminaires (Eliot & Frost) suitable for halls, stairs or other lighting purposes near to the mopboard. These products, which may have 1W (Eliot) or 4W (Frost), have a high IP rating and asymmetric beam angles, technical features needed in this type of light fitting. With a brushed aluminium, or white textured finish, and a CRI higher than 85, this product range (Eliot & Frost) is available on ON-OFF or dimmable 0-10V mode and is compatible with the DALI system as an option. NOTE: This product range has 3 Volts, requiring an external drive to connect the luminaires to 230 Volts, as well as a waterproof box to preserve the products IP.


POWER SUPPLY 12VDC / 50-60 Hz

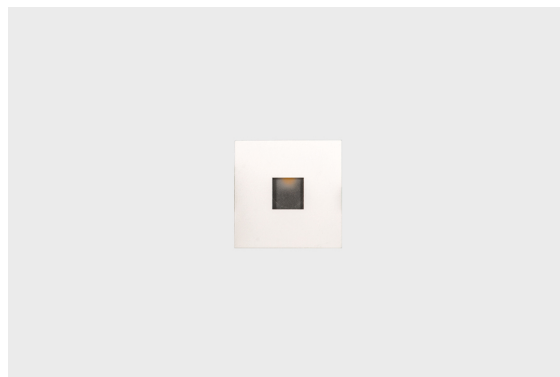

ICONOGRAPHY



TECHNICAL DRAWING

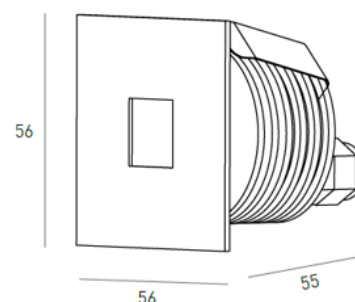

FROST 4W  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→85

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
56	4	TW	NF	45	315	240	3000K	346.85.BA.30.FI


SELECT YOUR PREFERRED OPTION


CONTROL TYPE XX  
ON/OFF NF


FINISHING FI  
Textured White TW


BEAM ANGLE BA  
45° 45

ACCESSORIES

 Waterproof box SEM TITULO - 4080-1030

 Output cable gland SEM TITULO - 4080-1031

 Cover for waterproof box SEM TITULO - 4080-1033

 LED Driver 6W 350mA SEM TITULO - 8015-0224