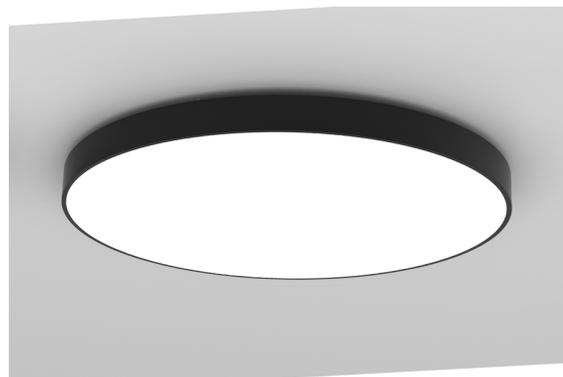



DESCRIPTION

A circle is the reflection of eternity, it has no beginning and it has no end. Brilumen proudly presents our new range of circular LED luminaires. With a 5 Year Warranty Heliuss is designed and inspired to deliver one complete ambient light with a seamless diffuser and profile. With an internal driver, different wattages, diameters and mounting types, these circular profiles can be easily applied in numerous locations, such as stores, cinemas, museums, galleries, hotels, restaurants, meeting rooms, offices, lounges, etc. The Olympia LED circular profile can also be configured with the options of ON-OFF, DALI and CASAMBI. Other dimmable options are as well available on request. Brilumen has also available the IES and LDT files for DIALux projects, providing technical assistance during lighting projects.

MOUNTING TYPE	Suspension
LIGHT DISTRIBUTION	Directa
POWER SUPPLY	220-230V / 50/60 Hz, 220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured Silver, Textured White
CONTROL	DALI / Switch Dim, ON/OFF


TECHNICAL DRAWING

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 194 lm/W
CRI	CRI→80
LIFESPAN	40.000 Hours Tp 55°
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/F10
PHOTOBIOLOGICAL RISK	RG0

ICONOGRAPHY

**HELIUS SURFACE
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - OPAL**

DIAMETER	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
400	17	TB, TS, TW	3000K	DA, NF	3060	2598	191XX.0409.8CT.FI
400	17	TB, TS, TW	4000K	DA, NF	3200	2717	191XX.0409.8CT.FI
600	29	TB, TS, TW	3000K	DA, NF	5120	4363	191XX.0609.8CT.FI
600	29	TB, TS, TW	4000K	DA, NF	5400	4601	191XX.0609.8CT.FI
900	57	TB, TS, TW	3000K	DA, NF	10320	8659	191XX.0909.8CT.FI
900	57	TB, TS, TW	4000K	DA, NF	10880	9129	191XX.0909.8CT.FI
1100	102	TB, TS, TW	3000K	DA, NF	18640	15695	191XX.1109.8CT.FI
1100	102	TB, TS, TW	4000K	DA, NF	19600	16504	191XX.1109.8CT.FI

**SELECT YOUR PREFERRED
OPTION**

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

**HELIUS SURFACE
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - PRISMATIC**

DIAMETER	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
400	17	TB, TS, TW	3000K	DA, NF	3060	2629	191XX.04P8.8CT.FI
400	17	TB, TS, TW	4000K	DA, NF	3200	2750	191XX.04P8.8CT.FI
600	29	TB, TS, TW	3000K	DA, NF	5120	4392	191XX.06P8.8CT.FI
600	29	TB, TS, TW	4000K	DA, NF	5400	4633	191XX.06P8.8CT.FI
900	57	TB, TS, TW	3000K	DA, NF	10320	8806	191XX.09P8.8CT.FI
900	57	TB, TS, TW	4000K	DA, NF	10880	9284	191XX.09P8.8CT.FI
1100	102	TB, TS, TW	3000K	DA, NF	18640	15848	191XX.11P8.8CT.FI
1100	102	TB, TS, TW	4000K	DA, NF	19600	16664	191XX.11P8.8CT.FI

**SELECT YOUR PREFERRED
OPTION**

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

ACCESSORIES




CASAMBI - DALI Interface
CASAMBI - DALI Interface

CASAMBI
8030-2590

PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS OPAL

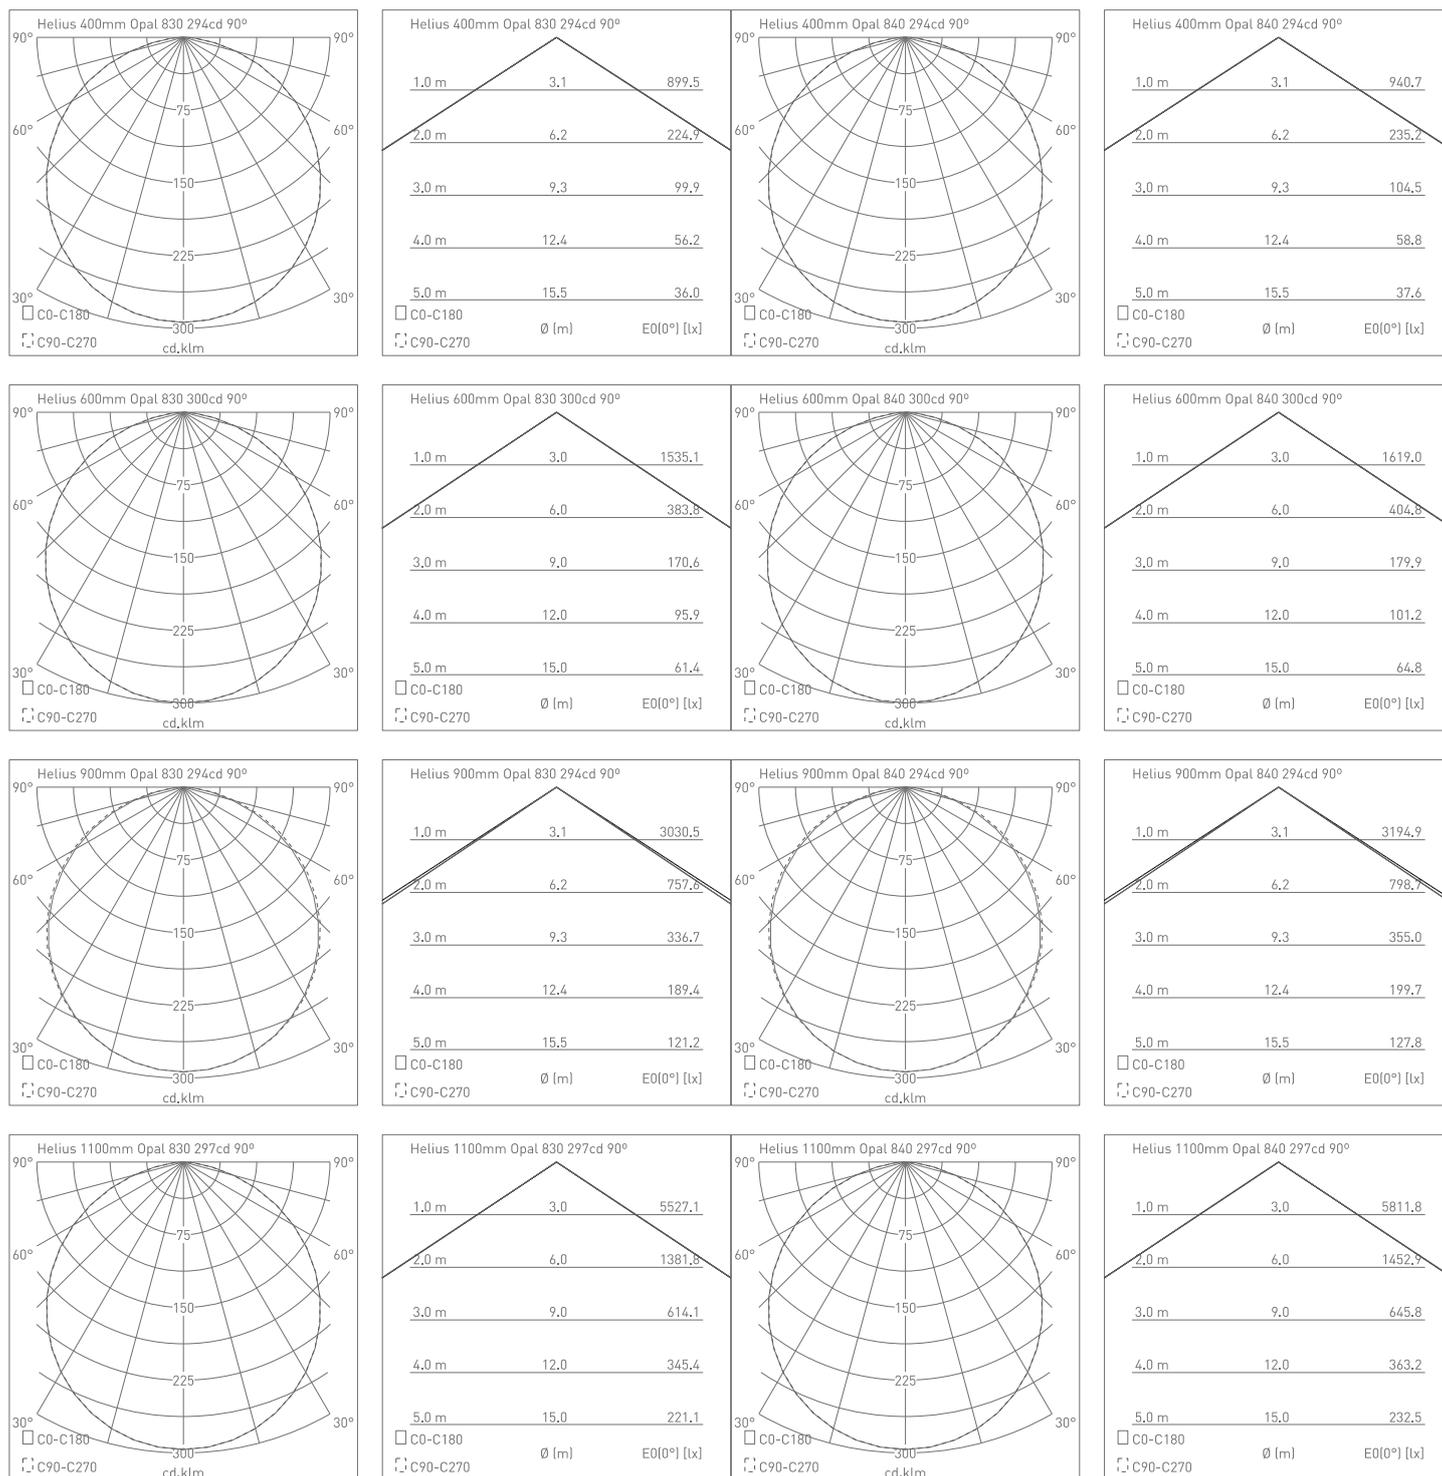

PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS PRISMATIC

