


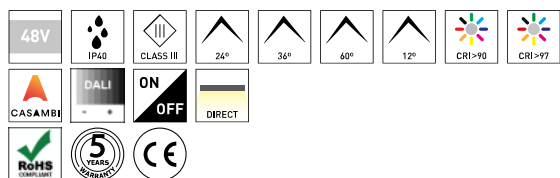
**DESCRIPTION**

The HERON projector stands out for its elegant design and next-generation LED technology. It delivers outstanding lighting performance in a compact and refined form. It is available with an adapter for 3-circuit universal tracks (230V) or low-voltage tracks (48V), in surface-mounted or recessed ceiling versions. With textured white or black finishes and the option of a gold ring, the HERON is an irresistible choice for projects that call for glamour and sophistication.

<b>MOUNTING</b>	CALHAS
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	48V / TRACK
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured Black and Gold, Textured White, Textured White and Gold
<b>CONTROL</b>	CASAMBI, DALI, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 98 lm/W
<b>CRI</b>	CRI->90, CRI->97
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**

**HERON 48V EVO TRACK LIGHT**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3136	2666	2700K	5403XX.12.927.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3136	2666	2700K	5403XX.24.927.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3136	2666	2700K	5403XX.36.927.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3136	2666	2700K	5403XX.60.927.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3136	2666	2700K	5408XX.12.927.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3136	2666	2700K	5408XX.24.927.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3136	2666	2700K	5408XX.36.927.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3136	2666	2700K	5408XX.60.927.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3234	2749	3000K	5403XX.12.930.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3234	2749	3000K	5403XX.24.930.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3234	2749	3000K	5403XX.36.930.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3234	2749	3000K	5403XX.60.930.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3234	2749	3000K	5408XX.12.930.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3234	2749	3000K	5408XX.24.930.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3234	2749	3000K	5408XX.36.930.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3234	2749	3000K	5408XX.60.930.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3479	2957	4000K	5403XX.12.940.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3479	2957	4000K	5403XX.24.940.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3479	2957	4000K	5403XX.36.940.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3479	2957	4000K	5403XX.60.940.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3479	2957	4000K	5408XX.12.940.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3479	2957	4000K	5408XX.24.940.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3479	2957	4000K	5408XX.36.940.FI
130	24,5	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	3479	2957	4000K	5408XX.60.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI	DL	Textured Black and Gold	TBG	24°	24
ON/OFF	NF	Textured White	TW	36°	36
		Textured White and Gold	TWG	60°	60


**HERON 48V EVO TRACK LIGHT**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI>97**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2511	2134	2700K	5475XX.12.9727.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2511	2134	2700K	5475XX.24.9727.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2511	2134	2700K	5475XX.36.9727.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2511	2134	2700K	5475XX.60.9727.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2511	2134	2700K	5477XX.12.9727.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2511	2134	2700K	5477XX.24.9727.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2511	2134	2700K	5477XX.36.9727.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2511	2134	2700K	5477XX.60.9727.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2664	2265	3000K	5475XX.12.9730.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2664	2265	3000K	5475XX.24.9730.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2664	2265	3000K	5475XX.36.9730.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2664	2265	3000K	5475XX.60.9730.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2664	2265	3000K	5477XX.12.9730.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2664	2265	3000K	5477XX.24.9730.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2664	2265	3000K	5477XX.36.9730.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2664	2265	3000K	5477XX.60.9730.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2818	2395	4000K	5475XX.12.9740.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2818	2395	4000K	5475XX.24.9740.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2818	2395	4000K	5475XX.36.9740.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2818	2395	4000K	5475XX.60.9740.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2818	2395	4000K	5477XX.12.9740.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2818	2395	4000K	5477XX.24.9740.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2818	2395	4000K	5477XX.36.9740.FI
130	25,6	TB, TBG, TW, TWG	CS, DL, NF	12, 24, 36, 60	2818	2395	4000K	5477XX.60.9740.FI

**SELECT YOUR PREFERRED OPTION**

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI	DL	Textured Black and Gold	TBG	24°	24
ON/OFF	NF	Textured White	TW	36°	36
		Textured White and Gold	TWG	60°	60

**ACCESSORIES**

	BT15E - Track 48V EVO Track 48V EVO 1M Track 48V EVO 2M	White 3080-0227E.WH 3080-0228E.WH	Black 3080-0227E.BL 3080-0228E.BL
	BT1E - Track 48V EVO Track 48V EVO 1M Track 48V EVO 2M	White 3080-0175E.WH 3080-0176E.WH	Black 3080-0175E.BL 3080-0176E.BL
	BT2E - Track 48V EVO Track 48V EVO 1M Track 48V EVO 2M	White 3080-0177E.WH 3080-0178E.WH	Black 3080-0177E.BL 3080-0178E.BL
	TK18E - Track 48V EVO Track 48V EVO 1M Track 48V EVO 2M	White 3080-0231E.WH 3080-0232E.WH	Black 3080-0231E.BL 3080-0232E.BL
	TK5E - Track 48V EVO Track 48V EVO 1M Track 48V EVO 2M	White 3080-0250E.WH 3080-0251E.WH	Black 3080-0250E.BL 3080-0251E.BL
	TK9E - Track 48V EVO Track 48V EVO 1M Track 48V EVO 2M	White 3080-0211E.WH 3080-0212E.WH	Black 3080-0211E.BL 3080-0212E.BL