

DESCRIPTION

The HERON from Brilumen is a track light with a great aesthetic beauty equipped with a high performance LED. The HERON combines excellent light performance in a delicate track light of relatively small dimensions. Recently, two new solutions for the use of this lighting fixture have been added: Surface and recessed versions. It is available in textured white and black finishing. The high quality textured black finishing and the option of golden ring present the HERON as an irrefutable choice for your project. This track light exists in two versions, for magnetic tracks or universal 3-circuit tracks.


Note: The Heron with code 403/475 is compatible with BT1/TK3 rails [Short Holder] while the Heron with code 408/477 is compatible with BT2/TK5/TK9 rails [Long Holder].

MOUNTING TYPE	Magnetic
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Textured Black, Textured Black and Gold, Textured White
CONTROL	CASAMBI, ON/OFF, DALI

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 145 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

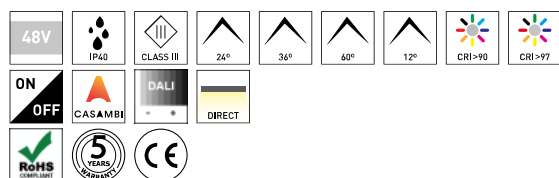

HERON MAGNETIC 48V PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90


LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2784	2367	2700K	403XX.12.927.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2784	2367	2700K	403XX.24.927.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2784	2367	2700K	403XX.36.927.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2784	2367	2700K	403XX.60.927.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2784	2367	2700K	408XX.12.927.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2784	2367	2700K	408XX.24.927.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2784	2367	2700K	408XX.36.927.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2784	2367	2700K	408XX.60.927.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2900	2465	3000K	403XX.12.930.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2900	2465	3000K	403XX.24.930.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2900	2465	3000K	403XX.36.930.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2900	2465	3000K	403XX.60.930.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2900	2465	3000K	408XX.12.930.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2900	2465	3000K	408XX.24.930.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2900	2465	3000K	408XX.36.930.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2900	2465	3000K	408XX.60.930.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2945	2504	4000K	403XX.12.940.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2945	2504	4000K	403XX.24.940.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2945	2504	4000K	403XX.36.940.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2945	2504	4000K	403XX.60.940.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2945	2504	4000K	408XX.12.940.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2945	2504	4000K	408XX.24.940.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2945	2504	4000K	408XX.36.940.FI
130	20.4	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2945	2504	4000K	408XX.60.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI	DL	Textured Black and Gold	TBG	24°	24
ON/OFF	NF	Textured White	TW	36°	36
				60°	60



TECHNICAL DRAWING




HERON MAGNETIC 48V
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2477	2106	2700K	475XX.12.9727.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2477	2106	2700K	475XX.24.9727.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2477	2106	2700K	475XX.36.9727.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2477	2106	2700K	475XX.60.9727.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2477	2106	2700K	477XX.12.9727.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2477	2106	2700K	477XX.24.9727.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2477	2106	2700K	477XX.36.9727.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2477	2106	2700K	477XX.60.9727.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2576	2190	3000K	475XX.12.9730.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2576	2190	3000K	475XX.24.9730.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2576	2190	3000K	475XX.36.9730.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2576	2190	3000K	475XX.60.9730.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2576	2190	3000K	477XX.12.9730.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2576	2190	3000K	477XX.24.9730.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2576	2190	3000K	477XX.36.9730.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2576	2190	3000K	477XX.60.9730.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2641	2245	4000K	475XX.12.9740.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2641	2245	4000K	475XX.24.9740.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2641	2245	4000K	475XX.36.9740.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2641	2245	4000K	475XX.60.9740.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2641	2245	4000K	477XX.12.9740.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2641	2245	4000K	477XX.24.9740.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2641	2245	4000K	477XX.36.9740.FI
130	20.8	TB, TBG, TW	CS, DL, NF	12, 24, 36, 60	2641	2245	4000K	477XX.60.9740.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE

XX

FINISHING

FI

BEAM ANGLE

BA

CASAMBI CS

Textured Black TB

12° 12

DALI DL

Textured Black and Gold TBG

24° 24

ON/OFF NF

Textured White TW

36° 36

60° 60

ACCESSORIES


BT1 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0175.WH	3080-0175.BL
Magnetic Track 48V 2M	3080-0176.WH	3080-0176.BL



BT2 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0177.WH	3080-0177.BL
Magnetic Track 48V 2M	3080-0178.WH	3080-0178.BL



TK3 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0205.WH	3080-0205.BL
Magnetic Track 48V 2M	3080-0206.WH	3080-0206.BL



TK5 48V Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0250.WH	3080-0250.BL
Magnetic Track 48V 2M	3080-0251.WH	3080-0251.BL



TK9 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0211.WH	3080-0211.BL
Magnetic Track 48V 2M	3080-0212.WH	3080-0212.BL