

**DESCRIPTION**

The HERON projector stands out for its elegant design and next-generation LED technology. It delivers outstanding lighting performance in a compact and refined form.

It is available with an adapter for 3-circuit universal tracks (230V) or low-voltage tracks (48V), in surface-mounted or recessed ceiling versions.

With textured white or black finishes and the option of a gold ring, the HERON is an irresistible choice for projects that call for glamour and sophistication.


|                        |  |
|------------------------|--|
| <b>MOUNTING</b>        | Surface  |
| <b>DISTRIBUICAOLUZ</b> | Direct   |
| <b>POWER SUPPLY</b>    | 220-230V / 50-60 Hz  |
| <b>WARRANTY</b>        | 5 Years  |
| <b>FINISHING</b>       | Textured Black, Textured Black and Gold, Textured White, Textured White and Gold |
| <b>CONTROL</b>         | CASAMBI, DALI / Switch Dim, ON/OFF   |




**LED FEATURES**

|                             |                 |
|-----------------------------|-----------------|
| <b>LUMINOUS EFFICIENCY</b>  | UP TO 98 lm/W   |
| <b>CRI</b>                  | CRI→90, CRI→97  |
| <b>LIFESPAN</b>             | 50.000 Hours    |
| <b>STEPS MACADAM</b>        | 3 Steps MacAdam |
| <b>LUMEN MAINTENANCE</b>    | L90/B50         |
| <b>PHOTOBIOLOGICAL RISK</b> | RG1             |

**ICONOGRAPHY**

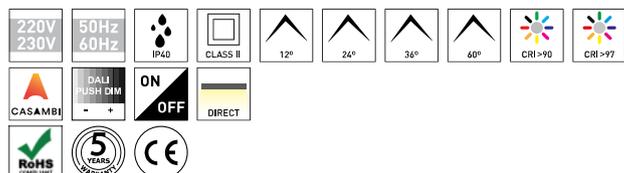

**TECHNICAL DRAWING**

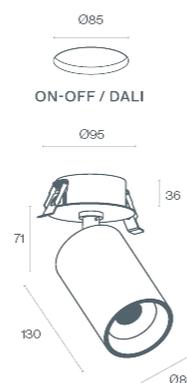

**HERON RECESSED SPOTLIGHT  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

| LENGTH | POWER | FINISHING        | CONTROLTYPE | BEAM ANGLE     | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE             |
|--------|-------|------------------|-------------|----------------|------------|--------------|-------------|------------------|
| 130    | 24.5  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 3136       | 2666         | 2700K       | 5455XX.12.927.FI |
| 130    | 24.5  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 3136       | 2666         | 2700K       | 5455XX.24.927.FI |
| 130    | 24.5  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 3136       | 2666         | 2700K       | 5455XX.36.927.FI |
| 130    | 24.5  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 3136       | 2666         | 2700K       | 5455XX.60.927.FI |
| 130    | 24.5  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 3234       | 2749         | 3000K       | 5455XX.12.930.FI |
| 130    | 24.5  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 3234       | 2749         | 3000K       | 5455XX.24.930.FI |
| 130    | 24.5  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 3234       | 2749         | 3000K       | 5455XX.36.930.FI |
| 130    | 24.5  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 3234       | 2749         | 3000K       | 5455XX.60.930.FI |
| 130    | 24.5  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 3479       | 2957         | 4000K       | 5455XX.12.940.FI |
| 130    | 24.5  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 3479       | 2957         | 4000K       | 5455XX.24.940.FI |
| 130    | 24.5  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 3479       | 2957         | 4000K       | 5455XX.36.940.FI |
| 130    | 24.5  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 3479       | 2957         | 4000K       | 5455XX.60.940.FI |

SELECT YOUR PREFERRED  
OPTION

| CONTROLTYPE       | XX | FINISHING               | FI  | BEAM ANGLE | BA |
|-------------------|----|-------------------------|-----|------------|----|
| CASAMBI           | CS | Textured Black          | TB  | 12°        | 12 |
| DALI / Switch Dim | DA | Textured Black and Gold | TBG | 24°        | 24 |
| ON/OFF            | NF | Textured White          | TW  | 36°        | 36 |
|                   |    | Textured White and Gold | TWG | 60°        | 60 |


**HERON RECESSED SPOTLIGHT  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->97**

| LENGTH | POWER | FINISHING        | CONTROLTYPE | BEAM ANGLE     | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE              |
|--------|-------|------------------|-------------|----------------|------------|--------------|-------------|-------------------|
| 130    | 25.6  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 2511       | 2134         | 2700K       | 5457XX.12.9727.FI |
| 130    | 25.6  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 2511       | 2134         | 2700K       | 5457XX.24.9727.FI |
| 130    | 25.6  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 2511       | 2134         | 2700K       | 5457XX.36.9727.FI |
| 130    | 25.6  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 2511       | 2134         | 2700K       | 5457XX.60.9727.FI |
| 130    | 25.6  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 2664       | 2265         | 3000K       | 5457XX.12.9730.FI |
| 130    | 25.6  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 2664       | 2265         | 3000K       | 5457XX.24.9730.FI |
| 130    | 25.6  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 2664       | 2265         | 3000K       | 5457XX.36.9730.FI |
| 130    | 25.6  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 2664       | 2265         | 3000K       | 5457XX.60.9730.FI |
| 130    | 25.6  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 2818       | 2395         | 4000K       | 5457XX.12.9740.FI |
| 130    | 25.6  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 2818       | 2395         | 4000K       | 5457XX.24.9740.FI |
| 130    | 25.6  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 2818       | 2395         | 4000K       | 5457XX.36.9740.FI |
| 130    | 25.6  | TB, TBG, TW, TWG | CS, DA, NF  | 12, 24, 36, 60 | 2818       | 2395         | 4000K       | 5457XX.60.9740.FI |

SELECT YOUR PREFERRED  
OPTION

| CONTROLTYPE       | XX | FINISHING               | FI  | BEAM ANGLE | BA |
|-------------------|----|-------------------------|-----|------------|----|
| CASAMBI           | CS | Textured Black          | TB  | 12°        | 12 |
| DALI / Switch Dim | DA | Textured Black and Gold | TBG | 24°        | 24 |
| ON/OFF            | NF | Textured White          | TW  | 36°        | 36 |
|                   |    | Textured White and Gold | TWG | 60°        | 60 |