

**DESCRIPTION**

The HERON from Brilumen is a track light with a great aesthetic beauty equipped with a high performance LED. The HERON combines excellent light performance in a delicate track light of relatively small dimensions. Recently, two new solutions for the use of this lighting fixture have been added: Surface and recessed versions. It is available in textured white and black finishing. The high quality textured black finishing and the option of golden ring present the HERON as an irrefutable choice for your project. This track light exists in two versions, for magnetic tracks or universal 3-circuit tracks.


<b>MOUNTING TYPE</b>	Uni Track
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured Black and Gold, Textured White, Textured White and Gold
<b>CONTROL</b>	CASAMBI, DALI / Switch Dim, ON/OFF




**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 98 lm/W
<b>CRI</b>	CRI→90, CRI→97
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

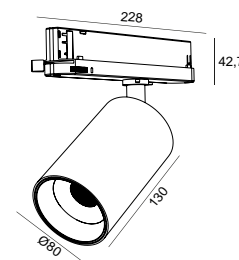

**ICONOGRAPHY**

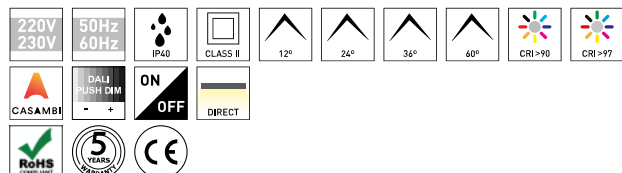

**HERON UNIVERSAL 230V  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3136	2666	2700K	5404XX.12.927.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3136	2666	2700K	5404XX.24.927.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3136	2666	2700K	5404XX.36.927.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3136	2666	2700K	5404XX.60.927.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3234	2749	3000K	5404XX.12.930.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3234	2749	3000K	5404XX.24.930.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3234	2749	3000K	5404XX.36.930.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3234	2749	3000K	5404XX.60.930.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3479	2957	4000K	5404XX.12.940.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3479	2957	4000K	5404XX.24.940.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3479	2957	4000K	5404XX.36.940.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3479	2957	4000K	5404XX.60.940.FI

**SELECT YOUR PREFERRED  
OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI / Switch Dim	DA	Textured Black and Gold	TBG	24°	24
ON/OFF	NF	Textured White	TW	36°	36
		Textured White and Gold	TWG	60°	60


**HERON UNIVERSAL 230V**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2511	2134	2700K	5468XX.12.9727.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2511	2134	2700K	5468XX.24.9727.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2511	2134	2700K	5468XX.36.9727.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2511	2134	2700K	5468XX.60.9727.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2664	2265	3000K	5468XX.12.9730.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2664	2265	3000K	5468XX.24.9730.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2664	2265	3000K	5468XX.36.9730.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2664	2265	3000K	5468XX.60.9730.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2818	2395	4000K	5468XX.12.9740.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2818	2395	4000K	5468XX.24.9740.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2818	2395	4000K	5468XX.36.9740.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2818	2395	4000K	5468XX.60.9740.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI / Switch Dim	DA	Textured Black and Gold	TBG	24°	24
ON/OFF	NF	Textured White	TW	36°	36
		Textured White and Gold	TWG	60°	60

**ACCESSORIES**

	Track ON/OFF Susp./Surf. ON/OFF Track 1m White ON/OFF Track 2m White SEM DescAbr - UP1459429 SEM DescAbr - UP1459429-1	UP1459102-1 UP1459102 UP1459429 UP1459429-1
	Track DALI Susp./Surf. DALI Track 1m White DALI Track 2m White SEM DescAbr - UP1459439 SEM DescAbr - UP1459439-1	UP1459107-1 UP1459107 UP1459439 UP1459439-1
	Recess. Track ON/OFF ON/OFF Rec. Track 1m BL ON/OFF Rec. Track 1m WH ON/OFF Rec. Track 2m BL ON/OFF Rec. Track 2m WH	UP1459312-1 UP1459112-1 UP1459312 UP1459112
	Recessed Track DALI DALI Rec. Track 1m BL DALI Rec. Track 1m WH DALI Rec. Track 2m BL DALI Rec. Track 2m WH	UP1459317-1 UP1459117-1 UP1459317 UP1459117