

DESCRIPTION

The HERON projector stands out for its elegant design and next-generation LED technology. It delivers outstanding lighting performance in a compact and refined form.


It is available with an adapter for 3-circuit universal tracks (230V) or low-voltage tracks (48V), in surface-mounted or recessed ceiling versions.

With textured white or black finishes and the option of a gold ring, the HERON is an irresistible choice for projects that call for glamour and sophistication.

MOUNTING	Uni Track
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured Black and Gold, Textured White, Textured White and Gold
CONTROL	CASAMBI, DALI / PUSH Dim, ON/OFF




TECHNICAL DRAWING

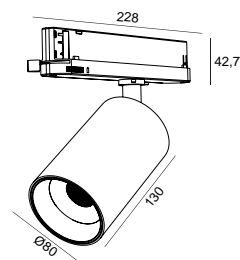

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 98 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

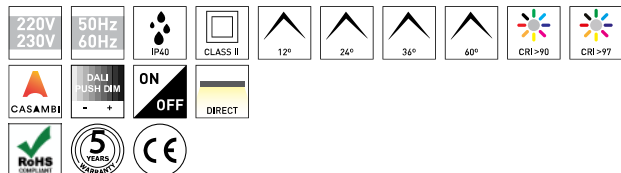

**HERON UNIVERSAL 230V
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
130	24,5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3136	2666	2700K	5404XX.12.927.FI
130	24,5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3136	2666	2700K	5404XX.24.927.FI
130	24,5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3136	2666	2700K	5404XX.36.927.FI
130	24,5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3136	2666	2700K	5404XX.60.927.FI
130	24,5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3234	2749	3000K	5404XX.12.930.FI
130	24,5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3234	2749	3000K	5404XX.24.930.FI
130	24,5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3234	2749	3000K	5404XX.36.930.FI
130	24,5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3234	2749	3000K	5404XX.60.930.FI
130	24,5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3479	2957	4000K	5404XX.12.940.FI
130	24,5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3479	2957	4000K	5404XX.24.940.FI
130	24,5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3479	2957	4000K	5404XX.36.940.FI
130	24,5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3479	2957	4000K	5404XX.60.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI / PUSH Dim	DA	Textured Black and Gold	TBG	24°	24
ON/OFF	NF	Textured White	TW	36°	36
		Textured White and Gold	TWG	60°	60



HERON UNIVERSAL 230V
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->97

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
130	25,6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2511	2134	2700K	5468XX.12.9727.FI
130	25,6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2511	2134	2700K	5468XX.24.9727.FI
130	25,6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2511	2134	2700K	5468XX.36.9727.FI
130	25,6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2511	2134	2700K	5468XX.60.9727.FI
130	25,6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2664	2265	3000K	5468XX.12.9730.FI
130	25,6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2664	2265	3000K	5468XX.24.9730.FI
130	25,6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2664	2265	3000K	5468XX.36.9730.FI
130	25,6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2664	2265	3000K	5468XX.60.9730.FI
130	25,6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2818	2395	4000K	5468XX.12.9740.FI
130	25,6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2818	2395	4000K	5468XX.24.9740.FI
130	25,6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2818	2395	4000K	5468XX.36.9740.FI
130	25,6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2818	2395	4000K	5468XX.60.9740.FI

SELECT YOUR PREFERRED
 OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI / PUSH Dim	DA	Textured Black and Gold	TBG	24°	24
ON/OFF	NF	Textured White	TW	36°	36
		Textured White and Gold	TWG	60°	60

ACCESSORIES

	Track ON/OFF Susp./Surf. ON/OFF Track 1m Black ON/OFF Track 1m White ON/OFF Track 2m Black ON/OFF Track 2m White	UP1459429-1 UP1459102-1 UP1459429 UP1459102
--	--	--

	Track DALI Susp./Surf. DALI Track 1m Black DALI Track 1m White DALI Track 2m Black DALI Track 2m White	UP1459439-1 UP1459107-1 UP1459439 UP1459107
--	--	--

	Recess. Track ON/OFF ON/OFF Rec. Track 1m BL ON/OFF Rec. Track 1m WH ON/OFF Rec. Track 2m BL ON/OFF Rec. Track 2m WH	UP1459312-1 UP1459112-1 UP1459312 UP1459112
--	--	--

	Recessed Track DALI DALI Rec. Track 1m BL DALI Rec. Track 1m WH DALI Rec. Track 2m BL DALI Rec. Track 2m WH	UP1459317-1 UP1459117-1 UP1459317 UP1459117
--	---	--