

DESCRIPTION


The HERON from Brilumen is a track light with a great aesthetic beauty equipped with a high performance LED. The HERON combines excellent light performance in a delicate track light of relatively small dimensions. Recently, two new solutions for the use of this lighting fixture have been added: Surface and recessed versions. It is available in textured white and black finishing. The high quality textured black finishing and the option of golden ring present the HERON as an irrefutable choice for your project. This track light exists in two versions, for magnetic tracks or universal 3-circuit tracks.

MOUNTING TYPE	Uni Track
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured Black and Gold, Textured White, Textured White and Gold
CONTROL	CASAMBI, DALI / Switch Dim, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 98 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

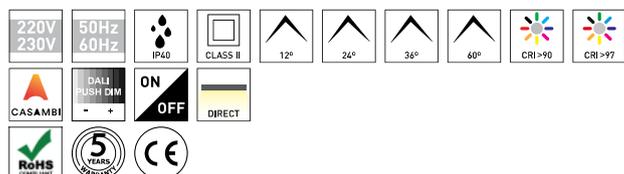

TECHNICAL DRAWING



HERON UNIVERSAL 230V
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3136	2666	2700K	5404XX.12.927.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3136	2666	2700K	5404XX.24.927.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3136	2666	2700K	5404XX.36.927.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3136	2666	2700K	5404XX.60.927.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3234	2749	3000K	5404XX.12.930.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3234	2749	3000K	5404XX.24.930.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3234	2749	3000K	5404XX.36.930.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3234	2749	3000K	5404XX.60.930.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3479	2957	4000K	5404XX.12.940.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3479	2957	4000K	5404XX.24.940.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3479	2957	4000K	5404XX.36.940.FI
130	24.5	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	3479	2957	4000K	5404XX.60.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI / Switch Dim	DA	Textured Black and Gold	TBG	24°	24
ON/OFF	NF	Textured White	TW	36°	36
		Textured White and Gold	TWG	60°	60


HERON UNIVERSAL 230V
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2511	2134	2700K	5468XX.12.9727.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2511	2134	2700K	5468XX.24.9727.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2511	2134	2700K	5468XX.36.9727.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2511	2134	2700K	5468XX.60.9727.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2664	2265	3000K	5468XX.12.9730.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2664	2265	3000K	5468XX.24.9730.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2664	2265	3000K	5468XX.36.9730.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2664	2265	3000K	5468XX.60.9730.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2818	2395	4000K	5468XX.12.9740.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2818	2395	4000K	5468XX.24.9740.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2818	2395	4000K	5468XX.36.9740.FI
130	25.6	TB, TBG, TW, TWG	CS, DA, NF	12, 24, 36, 60	2818	2395	4000K	5468XX.60.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI / Switch Dim	DA	Textured Black and Gold	TBG	24°	24
ON/OFF	NF	Textured White	TW	36°	36
		Textured White and Gold	TWG	60°	60

ACCESSORIES

Track ON/OFF Susp./Surf.
 ON/OFF Track 1m White UP1459102-1
 ON/OFF Track 2m White UP1459102
 SEM DescAbr - UP1459429 UP1459429
 SEM DescAbr - UP1459429-1 UP1459429-1

Track DALI Susp./Surf.
 DALI Track 1m White UP1459107-1
 DALI Track 2m White UP1459107
 SEM DescAbr - UP1459439 UP1459439
 SEM DescAbr - UP1459439-1 UP1459439-1

Recess. Track ON/OFF
 ON/OFF Rec. Track 1m BL UP1459312-1
 ON/OFF Rec. Track 1m WH UP1459112-1
 ON/OFF Rec. Track 2m BL UP1459312
 ON/OFF Rec. Track 2m WH UP1459112

Recessed Track DALI
 DALI Rec. Track 1m BL UP1459317-1
 DALI Rec. Track 1m WH UP1459117-1
 DALI Rec. Track 2m BL UP1459317
 DALI Rec. Track 2m WH UP1459117