

DESCRIPTION

The HERON projector stands out for its elegant design and next-generation LED technology. It delivers outstanding lighting performance in a compact and refined form.

It is available with an adapter for 3-circuit universal tracks (230V) or low-voltage tracks (48V), in surface-mounted or recessed ceiling versions.


With textured white or black finishes and the option of a gold ring, the HERON is an irresistible choice for projects that call for glamour and sophistication.

MOUNTING	Uni Track
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured Black and Gold, Textured White, Textured White and Gold
CONTROL	DALI, ON/OFF

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 98 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

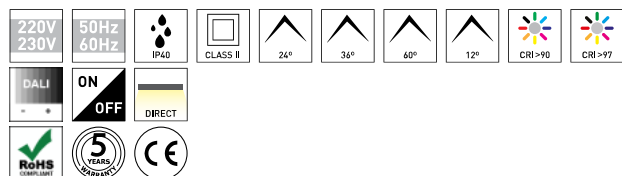

HERON INVITRACK 230V PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90


LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
130	24,5	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	3136	2666	2700K	5419XX.12.927.FI
130	24,5	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	3136	2666	2700K	5419XX.24.927.FI
130	24,5	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	3136	2666	2700K	5419XX.36.927.FI
130	24,5	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	3136	2666	2700K	5419XX.60.927.FI
130	24,5	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	3234	2749	3000K	5419XX.12.930.FI
130	24,5	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	3234	2749	3000K	5419XX.24.930.FI
130	24,5	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	3234	2749	3000K	5419XX.36.930.FI
130	24,5	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	3234	2749	3000K	5419XX.60.930.FI
130	24,5	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	3479	2957	4000K	5419XX.12.940.FI
130	24,5	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	3479	2957	4000K	5419XX.24.940.FI
130	24,5	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	3479	2957	4000K	5419XX.36.940.FI
130	24,5	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	3479	2957	4000K	5419XX.60.940.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI	DL	Textured Black	TB	12°	12
ON/OFF	NF	Textured Black and Gold	TBG	24°	24
		Textured White	TW	36°	36
		Textured White and Gold	TWG	60°	60



TECHNICAL DRAWING

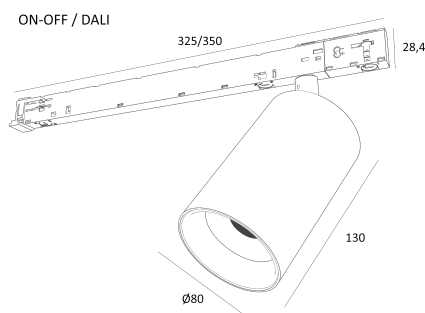


HERON INVITRACK 230V
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
130	25,6	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	2511	2134	2700K	5423XX.12.9727.FI
130	25,6	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	2511	2134	2700K	5423XX.24.9727.FI
130	25,6	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	2511	2134	2700K	5423XX.36.9727.FI
130	25,6	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	2511	2134	2700K	5423XX.60.9727.FI
130	25,6	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	2664	2265	3000K	5423XX.12.9730.FI
130	25,6	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	2664	2265	3000K	5423XX.24.9730.FI
130	25,6	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	2664	2265	3000K	5423XX.36.9730.FI
130	25,6	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	2664	2265	3000K	5423XX.60.9730.FI
130	25,6	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	2818	2395	4000K	5423XX.12.9740.FI
130	25,6	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	2818	2395	4000K	5423XX.24.9740.FI
130	25,6	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	2818	2395	4000K	5423XX.36.9740.FI
130	25,6	TB, TBG, TW, TWG	DL, NF	12, 24, 36, 60	2818	2395	4000K	5423XX.60.9740.FI

**SELECT YOUR PREFERRED
OPTION**

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI	DL	Textured Black	TB	12°	12
ON/OFF	NF	Textured Black and Gold	TBG	24°	24
		Textured White	TW	36°	36
		Textured White and Gold	TWG	60°	60

ACCESSORIES


Track ON/OFF Susp./Surf.
 ON/OFF Track 1m Black UP1459429-1
 ON/OFF Track 1m White UP1459102-1
 ON/OFF Track 2m Black UP1459429
 ON/OFF Track 2m White UP1459102



Track DALI Susp./Surf.
 DALI Track 1m Black UP1459439-1
 DALI Track 1m White UP1459107-1
 DALI Track 2m Black UP1459439
 DALI Track 2m White UP1459107



Recess. Track ON/OFF
 ON/OFF Rec. Track 1m BL UP1459312-1
 ON/OFF Rec. Track 1m WH UP1459112-1
 ON/OFF Rec. Track 2m BL UP1459312
 ON/OFF Rec. Track 2m WH UP1459112



Recessed Track DALI
 DALI Rec. Track 1m BL UP1459317-1
 DALI Rec. Track 1m WH UP1459117-1
 DALI Rec. Track 2m BL UP1459317
 DALI Rec. Track 2m WH UP1459117