

**DESCRIPTION**

One of the lighting trends is the trimless downlights, aluminium light fittings without trims, perfect to recess in false ceilings. Brilumen introduces you this range of products, indented or with tube, suitable for ambient lighting of any room that requires discrete luminaires which do not change the ceiling aesthetics, but at the same time are modern with advanced technology, and effectively illuminate the entire environment.


<b>MOUNTING</b>	Recessed
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured White
<b>CONTROL</b>	CASAMBI, DALI / PUSH Dim, ON/OFF




**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 153 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

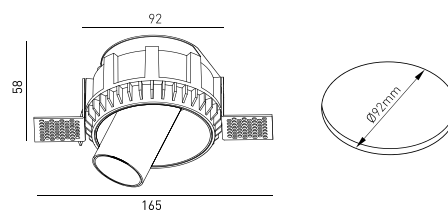

**ICONOGRAPHY**

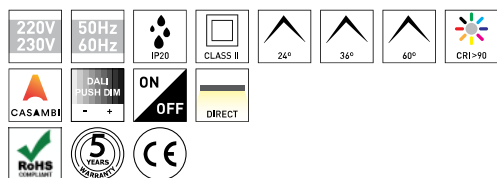

**HUBBLE TRIM. DOWNLIGHT**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
92	6	TW	CS, DA, NF	24, 36, 60	821	698	2700K	5337XX.BA.927.FI
92	6	TW	CS, DA, NF	24, 36, 60	857	728	3000K	5337XX.BA.930.FI
92	6	TW	CS, DA, NF	24, 36, 60	910	774	4000K	5337XX.BA.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / PUSH Dim	DA			36°	36
ON/OFF	NF			60°	60