

DESCRIPTION

One of the lighting trends is the trimless downlights, aluminium light fittings without trims, perfect to recess in false ceilings. Brilumen introduces you this range of products, indented or with tube, suitable for ambient lighting of any room that requires discrete luminaires which do not change the ceiling aesthetics, but at the same time are modern with advanced technology, and effectively illuminate the entire environment.


MOUNTING	Recessed
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured White
CONTROL	CASAMBI, DALI / PUSH Dim, ON/OFF




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 153 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

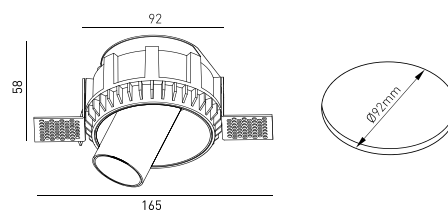

ICONOGRAPHY

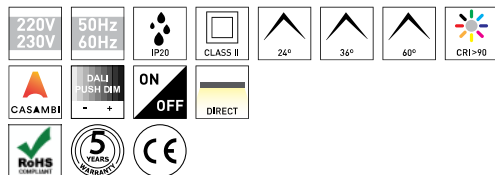

 HUBBLE TRIM. DOWNLIGHT
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
92	6	TW	CS, DA, NF	24, 36, 60	821	698	2700K	5337XX.BA.927.FI
92	6	TW	CS, DA, NF	24, 36, 60	857	728	3000K	5337XX.BA.930.FI
92	6	TW	CS, DA, NF	24, 36, 60	910	774	4000K	5337XX.BA.940.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	24°	24
DALI / PUSH Dim	DA			36°	36
ON/OFF	NF			60°	60