

## DESCRIPTION

INDYLINER, a new luminaire specific for indirect lighting, fully integrated in the top part of the 48V EVO track, TK9 model. The TK9 track allows for direct and/or indirect lighting, combining linear luminaires with track lights.

We highlight a new option for placing track lights on the top part of the track, using an articulated support, which allows the APALIS and/or ROSS track lights to be directed downwards, providing precise and effective lighting.

Our products guarantee exceptional light quality, with a high color rendering index, and a 5-year warranty, showing our confidence in their durability and reliability.

LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI, ON/OFF

## LED FEATURES

LUMINOUS EFFICIENCY	UP TO 167 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBILOGICAL RISK	RG1

## ICONOGRAPHY



## INDYLINER OPAL 48V EVO PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
600	6.8	TB, TW	CS, DL, NF	90	1068	747	3000K	5226XX.0609.930.FI
600	6.8	TB, TW	CS, DL, NF	90	1136	795	4000K	5226XX.0609.940.FI
900	10.2	TB, TW	CS, DL, NF	90	1601	1121	3000K	5226XX.0909.930.FI
900	10.2	TB, TW	CS, DL, NF	90	1703	1192	4000K	5226XX.0909.940.FI

SELECT YOUR PREFERRED  
OPTION

CONTROL TYPE  
XX  
CASAMBI  
DALI  
ON/OFF


FINISHING  
FI  
Textured Black  
Textured White

BEAM ANGLE  
90°  
BA  
90

## ACCESSORIES



TK9E - Track 48V EVO	White	Black
Track 48V EVO 1M	3080-0211E.WH	
Track 48V EVO 1M	3080-0211E.BL	
Track 48V EVO 2M	3080-0212E.WH	
Track 48V EVO 2M	3080-0212E.BL	

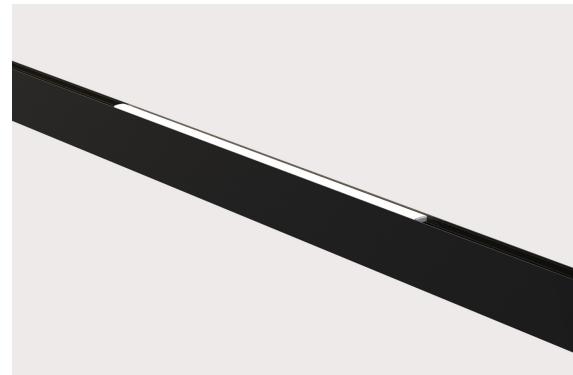

## TECHNICAL DRAWING

