

DESCRIPTION

We present the INDYLINER, a new luminaire specific for indirect lighting, fully integrated in the top part of the 48V magnetic track, TK9 model. The TK9 track allows for direct and/or indirect lighting, combining linear luminaires with track lights.

We highlight a new option for placing track lights on the top part of the track, using an articulated support, which allows the APALIS and/or ROSS track lights to be directed downwards, providing precise and effective lighting.


Our products guarantee exceptional light quality, with a high color rendering index, and a 5-year warranty, showing our confidence in their durability and reliability.

MOUNTING TYPE	Magnetic
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	ON/OFF

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 129 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY



INDYLINER OPAL 48V PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
5	TB, TW	NF	90	605	484	3000K	226XX.0509.930.FI
5	TB, TW	NF	90	645	516	4000K	226XX.0509.940.FI
10	TB, TW	NF	90	1210	968	3000K	226XX.1009.930.FI
10	TB, TW	NF	90	1290	1032	4000K	226XX.1009.940.FI
15	TB, TW	NF	90	1815	1452	3000K	226XX.1509.930.FI
15	TB, TW	NF	90	1935	1548	4000K	226XX.1509.940.FI

SELECT YOUR PREFERRED
OPTION


CONTROL TYPE	XX
ON/OFF	NF

FINISHING	FI
Textured Black	TB
Textured White	TW

BEAM ANGLE	BA
90°	90



TECHNICAL DRAWING

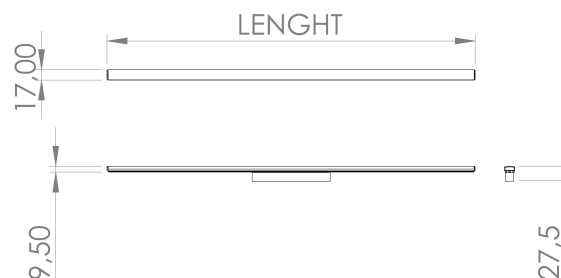

ACCESSORIES



TK9 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0211.WH	3080-0211.BL
Magnetic Track 48V 2M	3080-0212.WH	3080-0212.BL