

**DESCRIPTION**

IRIS tubular 360° is an elegant lighting fixture with a minimalist design. It is available from 300mm to 1500mm lengths ranging. Drawing a perfect linear light, IRIS is suitable for lighting up effectively any indoor area through a beautiful, uniform and harmonious light. Tubular fixture composed of an opal polycarbonate tube and aluminium end caps; white or black textured finish; 360° light emission. IRIS can be suspended horizontally or vertically, surface mounted or recessed in the ceiling. It can also be placed in a 48V or in a 3-circuits universal track. In both cases, it can be combined with other Brilumen track lights.

LIGHT DISTRIBUTION 360°  
 WARRANTY 5 Years  
 CONTROL N/A

**LED FEATURES**

CRI CRI→90  
 LIFESPAN 50.000 Hours  
 STEPS MACADAM 3 Steps MacAdam  
 LUMEN MAINTENANCE L90/B50  
 PHOTOBIOLOGICAL RISK RG1

**ICONOGRAPHY**



IRIS TRACK VERTICAL 360  
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

| LENGTH | POWER | FINISHING | COLOR TEMP. | CONTROLTYPE | LED LUMENS | LUMINAIRE LM | CODE            |
|--------|-------|-----------|-------------|-------------|------------|--------------|-----------------|
| 640    | 17    | TB, TW    | 3000K       | N/A         | 2737       | 2258         | 5163V.06.930.FI |
| 640    | 17    | TB, TW    | 4000K       | N/A         | 2907       | 2398         | 5163V.06.940.FI |
| 940    | 23,8  | TB, TW    | 3000K       | N/A         | 3832       | 3161         | 5163V.09.930.FI |
| 940    | 23,8  | TB, TW    | 4000K       | N/A         | 4070       | 3358         | 5163V.09.940.FI |
| 1240   | 30,6  | TB, TW    | 3000K       | N/A         | 4927       | 4064         | 5163V.12.930.FI |
| 1240   | 30,6  | TB, TW    | 4000K       | N/A         | 5233       | 4317         | 5163V.12.940.FI |

SELECT YOUR PREFERRED OPTION


| CONTROLTYPE | XX  | COLOR TEMP. | CT | FINISHING      | FI |
|-------------|-----|-------------|----|----------------|----|
| N/A         | N/A | 3000K       | 30 | Textured Black | TB |
|             |     | 4000K       | 40 | Textured White | TW |

**ACCESSORIES**

|  |  |  |
|--|--|--|
|  | Track ON/OFF Susp./Surf.<br>ON/OFF Track 1m Black<br>ON/OFF Track 1m White<br>ON/OFF Track 2m Black<br>ON/OFF Track 2m White     | UP1459429-1<br>UP1459102-1<br>UP1459429<br>UP1459102   |
|  | Track DALI Susp./Surf.<br>DALI Track 1m Black<br>DALI Track 1m White<br>DALI Track 2m Black<br>DALI Track 2m White               | UP1459439-1<br>UP1459107-1<br>UP1459439<br>UP1459107   |
|  | Recess. Track ON/OFF<br>ON/OFF Rec. Track 1m BL<br>ON/OFF Rec. Track 1m WH<br>ON/OFF Rec. Track 2m BL<br>ON/OFF Rec. Track 2m WH | UP1459312-1<br>UP1459112-1<br>UP1459312<br>UP1459112   |
|  | Recessed Track DALI<br>DALI Rec. Track 1m BL<br>DALI Rec. Track 1m WH<br>DALI Rec. Track 2m BL<br>DALI Rec. Track 2m WH          | UP1459317-1<br>UP1459117-1<br>UP1459317<br>UP1459117   |
|  | 230V Track C. Kit<br>Textured Black<br><br>Textured White  | ON/OFF<br>273NF.06.TB,<br>273NF.09.TB,<br>273NF.12.TB,<br>273NF.06.TW,<br>DALI Push<br>273DA.06.TB,<br>273DA.09.TB,<br>273DA.12.TB,<br>273DA.06.TW,<br>CASAMBI<br>273CS.06.TB,<br>273CS.09.TB,<br>273CS.12.TB,<br>273CS.06.TW, |



**TECHNICAL DRAWING**

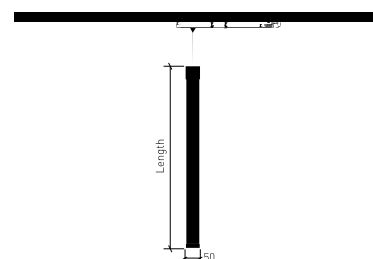

273NF.09.TW, 273DA.09.TW, 273CS.09.TW,  
273NF.12.TW 273DA.12.TW 273CS.12.TW



Power Cable 1.5m  
Power Cable 1.5m

ON/OFF  
80303001



Power Cable 3m  
Power Cable 3m

ON/OFF  
80303002



Power Cable 5m  
Power Cable 5m

ON/OFF  
80303003