

**DESCRIPTION**

IRIS tubular 360° is an elegant lighting fixture with a minimalist design. It is available from 300mm to 1500mm lengths ranging. Drawing a perfect linear light, IRIS is suitable for lighting up effectively any indoor area through a beautiful, uniform and harmonious light. Tubular fixture composed of an opal polycarbonate tube and aluminium end caps; white or black textured finish; 360° light emission. IRIS can be suspended horizontally or vertically, surface mounted or recessed in the ceiling. It can also be placed in a magnetic or in a 3-circuits universal track. In both cases, it can be combined with other Brilumen track lights.

LIGHT DISTRIBUTION            Direct  
WARRANTY                        5 Years  
CONTROL                            N/A

**LED FEATURES**

CRI                                 CRI→90  
LIFESPAN                        50.000 Hours  
STEPS MACADAM                3 Steps MacAdam  
LUMEN MAINTENANCE        L90/B50  
PHOTOBIOLOGICAL RISK      RG1

**ICONOGRAPHY**


**IRIS TRACK VERTICAL 360**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

| LENGTH | POWER | FINISHING | COLOR TEMP. | CONTROL TYPE | LED LUMENS | LUMINAIRE LM | CODE            |
|--------|-------|-----------|-------------|--------------|------------|--------------|-----------------|
| 640    | 17    | TB, TW    | 3000K       | N/A          | 2737       | 2258         | 5163V.06.930.FI |
| 640    | 17    | TB, TW    | 4000K       | N/A          | 2907       | 2398         | 5163V.06.940.FI |
| 940    | 23.8  | TB, TW    | 3000K       | N/A          | 3832       | 3161         | 5163V.09.930.FI |
| 940    | 23.8  | TB, TW    | 4000K       | N/A          | 4070       | 3358         | 5163V.09.940.FI |
| 1240   | 30.6  | TB, TW    | 3000K       | N/A          | 4927       | 4064         | 5163V.12.930.FI |
| 1240   | 30.6  | TB, TW    | 4000K       | N/A          | 5233       | 4317         | 5163V.12.940.FI |

SELECT YOUR PREFERRED  
OPTION

| CONTROL TYPE | XX  |
|--------------|-----|
| N/A          | N/A |

| COLOR TEMP. | CT |
|-------------|----|
| 3000K       | 30 |
| 4000K       | 40 |

| FINISHING      | FI |
|----------------|----|
| Textured Black | TB |
| Textured White | TW |

**ACCESSORIES**



|  |                      |              |              |
|--|----------------------|--------------|--------------|
|  | 230V Track ON/OFF    | White        | Black        |
|  | 230V Track ON/OFF 1M | 3080-0300.WH | 3080-0300.BL |
|  | 230V Track ON/OFF 2M | 3080-0301.WH | 3080-0301.BL |

|  |                    |              |              |
|--|--------------------|--------------|--------------|
|  | 230V Track DALI    | White        | Black        |
|  | 230V Track DALI 1M | 3080-0517.WH | 3080-0517.BL |
|  | 230V Track DALI 2M | 3080-0518.WH | 3080-0518.BL |

|  |                           |              |              |
|--|---------------------------|--------------|--------------|
|  | Recess. 230V Track ON/OFF | White        | Black        |
|  | 230V Track ON/OFF 1M      | 3080-0336.WH | 3080-0336.BL |
|  | 230V Track ON/OFF 2M      | 3080-0337.WH | 3080-0337.BL |

|  |                          |              |              |
|--|--------------------------|--------------|--------------|
|  | Recessed 230V Track DALI | White        | Black        |
|  | 230V Track DALI 1M       | 3080-0553.WH | 3080-0553.BL |
|  | 230V Track DALI 2M       | 3080-0554.WH | 3080-0554.BL |

|  |                   |              |              |              |
|--|-------------------|--------------|--------------|--------------|
|  | 230V Track C. Kit | ON/Off       | DALI Push    | CASAMBI      |
|  | Textured Black    | 273NF.06.TB, | 273DA.06.TB, | 273CS.06.TB, |
|  |                   | 273NF.09.TB, | 273DA.09.TB, | 273CS.09.TB, |
|  | Textured White    | 273NF.12.TB  | 273DA.12.TB  | 273CS.12.TB  |
|  |                   | 273NF.06.TW, | 273DA.06.TW, | 273CS.06.TW, |

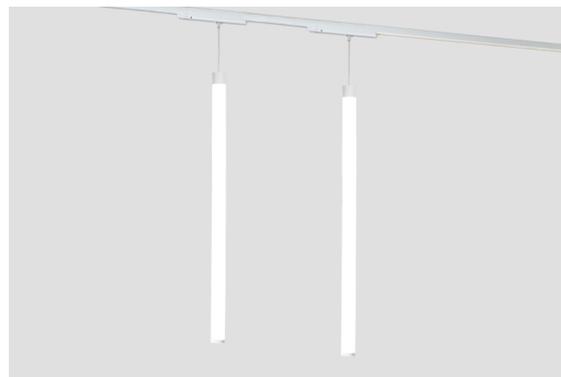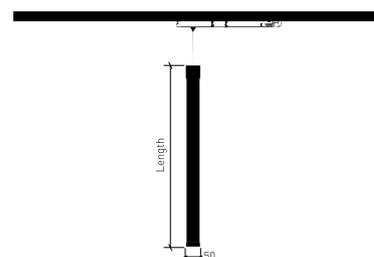
**TECHNICAL DRAWING**


273NF.09.TW, 273DA.09.TW, 273CS.09.TW,  
273NF.12.TW 273DA.12.TW 273CS.12.TW




230V Track C. Kit 940MM  
230V Track C. Kit 940MM

SEM TITULO -  
27309AV




230V Track C. Kit 1240MM  
230V Track C. Kit 1240MM

SEM TITULO -  
27312AV




Power Cable 1.5m  
Power Cable 1.5m

ON/Off  
80303001



Power Cable 3m  
Power Cable 3m

ON/Off  
80303002



Power Cable 5m  
Power Cable 5m

ON/Off  
80303003