

**DESCRIPTION**

IRIS V 360°, with an IP65, marks a new twist in the IRIS 360° lighting range, which until now was only available with an IP40.

This elegant new luminaire, with a minimalist design, extends the use of the 360° range as it can be applied whenever a waterproof. IP65 fixture is required.

Tubular fixture composed of an opal polycarbonate tube and aluminium end caps.

It is possible to install it outdoors as long as it is protected from direct sunlight.

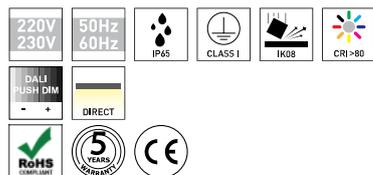
Due to the specificity of the Driver, it is only available in the DALI version, but it can be used as ON/OFF.



<b>APPLICATION</b>	AreasAplicação TEST EN
<b>LIGHT DISTRIBUTION</b>	Direct
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Anodized aluminium
<b>CONTROL</b>	DALI / Switch Dim

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 206,53501935 lm/W
<b>CRI</b>	CRI→80
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**ICONOGRAPHY**

**IRIS WATERPROOF 360**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
600	15	AL	3000K	DA	2926	2414	281XX.06.830.FI
600	15	AL	4000K	DA	3098	2556	281XX.06.840.FI
900	21	AL	3000K	DA	4096	3379	281XX.09.830.FI
900	21	AL	4000K	DA	4337	3578	281XX.09.840.FI
1200	25.8	AL	3000K	DA	5033	4151	281XX.12.830.FI
1200	25.8	AL	4000K	DA	5329	4396	281XX.12.840.FI
1500	36	AL	3000K	DA	7022	5793	281XX.15.830.FI
1500	36	AL	4000K	DA	7435	6134	281XX.15.840.FI

SELECT YOUR PREFERRED OPTION	CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
	DALI / Switch Dim	DA	3000K	30	Anodized aluminium	AL
			4000K	40		

**ACCESSORIES**


Power Cable 0,75	ON/Off	DALI Push
Power Cable 1.5m	80303001	
Power Cable 1.5m	80303004	
Power Cable 3m	80303002	
Power Cable 3m	80303005	
Power Cable 5m	80303003	
Power Cable 5m	80303006	