

## DESCRIPTION

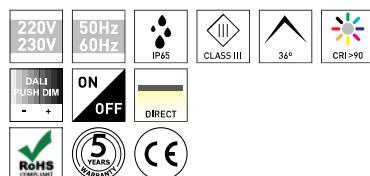
When the night hides the light, light up the stars with the Brilumen's spotlight range (Kyoto & Kyoto) and provide a beautiful light to your room, making it stunning. Thanks to its small size, with this range it's possible to create numerous designs on the ceiling or wall, and with a colour rendering index higher than 90. Due to its textured white finish and high IP rating, this versatile product range can be installed in numerous locations, working as ambient light and complementing the remaining light fittings, or even as a presence light in halls, lifts, etc.

|                    |                           |
|--------------------|---------------------------|
| MOUNTING TYPE      | Recessed                  |
| LIGHT DISTRIBUTION | Direct                    |
| WARRANTY           | 5 Years                   |
| FINISHING          | Textured white and black  |
| CONTROL            | DALI / Switch Dim, ON/OFF |

## LED FEATURES

|                      |                 |
|----------------------|-----------------|
| LUMINOUS EFFICIENCY  | UP TO 157 lm/W  |
| CRI                  | CRI→90          |
| LIFESPAN             | 50.000 Hours    |
| STEPS MACADAM        | 3 Steps MacAdam |
| LUMEN MAINTENANCE    | L90/B50         |
| PHOTOBIOLOGICAL RISK | RG1             |

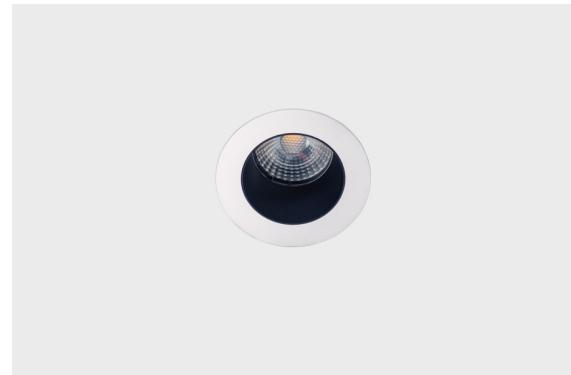
## ICONOGRAPHY


**KYOTO 4,5W IP65**
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

| LENGTH | POWER | FINISHING | CONTROL TYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE             |
|--------|-------|-----------|--------------|------------|------------|--------------|-------------|------------------|
| 56     | 4.2   | TWB       | DA, NF       | 36         | 589        | 501          | 2700K       | 5343XX.36.927.FI |
| 56     | 4.2   | TWB       | DA, NF       | 36         | 614        | 522          | 3000K       | 5343XX.36.930.FI |
| 56     | 4.2   | TWB       | DA, NF       | 36         | 652        | 554          | 4000K       | 5343XX.36.940.FI |

**SELECT YOUR PREFERRED  
OPTION**
**CONTROL TYPE** XX  
DALI / Switch Dim  
ON/OFF

**FINISHING** FI  
Textured white and  
black

**BEAM ANGLE** BA  
36°  
36


## TECHNICAL DRAWING

