

quality products with high IP ratings, and the floor lighting is no exception. If you are looking for a guide to your garden, the 9W Lemur will illuminate your path discreetly and with a variable light, with different beam angles that vary according to the light incidence.

MOUNTING TYPE LIGHT DISTRIBUTION POWER SUPPLY Surface Direct 220-230V / 50-60 Hz

WARRANTY 2 Years **FINISHING** CONTROL ON/OFF

# LED FEATURES

**LUMINOUS EFFICIENCY** UP TO 47 lm/W CRI→80 LIFESPAN 30000h Tp55 STEPS MACADAM 3 Steps MacAdam LUMEN MAINTENANCE L90/B50


PHOTOBIOLOGICAL RISK RG1

# ICONOGRAPHY












# **TECHNICAL DRAWING**

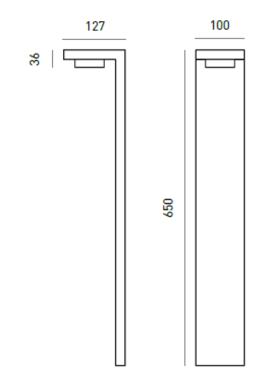



# PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80


		FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	
127	9	TG	NF	35° long/10°	660	323	3000K	510.80.25.30
				transv				
127	9	TG	NF	35° long/10°	693	340	4000K	510.80.25.40
				transv				

SELECT YOUR PREFERRED OPTION ON/OFF NF



# PHOTOMETRIC DATA

# POLAR DIAGRAM AND LUMINOUS FLUX - LENS Titulo





ODIC 24W 4000K CDI90 1120MM