

**DESCRIPTION**

The Outdoor Lighting range developed by Brilumen is essentially based on differentiated, high-quality products with high IP ratings, and the floor lighting is no exception. If you are looking for a guide to your garden, the 9W Lemur will illuminate your path discreetly and with a variable light, with different beam angles that vary according to the light incidence.


MOUNTING TYPE	Surface
LIGHT DISTRIBUTION	Directa
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	2 Years
FINISHING	TG
CONTROL	ON/OFF

**LED FEATURES**

LUMINOUS EFFICIENCY	UP TO 47 lm/W
CRI	CRI→80
LIFESPAN	30000h Tp55
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1



**TECHNICAL DRAWING**

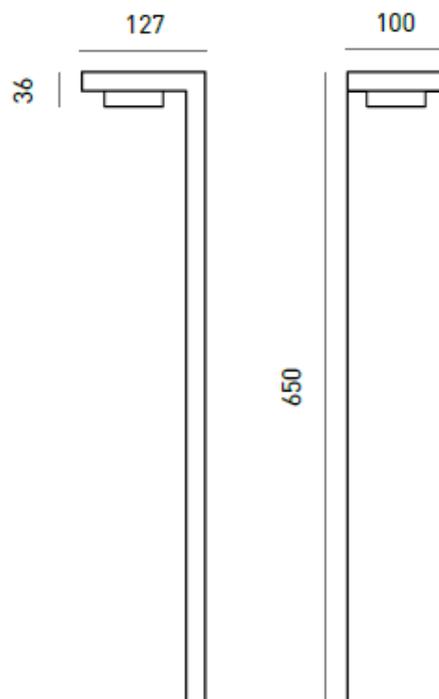

**ICONOGRAPHY**



**LEMUR 9W**  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80


LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
127	9	TG	NF	35° long/10° transv	660	323	3000K	510.80.25.30
127	9	TG	NF	35° long/10° transv	693	340	4000K	510.80.25.40

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX
ON/OFF	NF

PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS Titulo

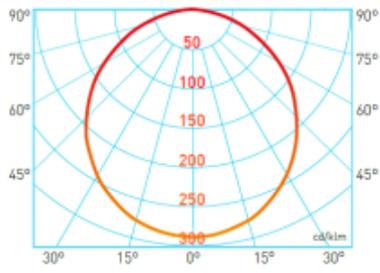

1m	Ø3,3m	1.382,5 lx
2m	Ø6,5m	345,6 lx
3m	Ø9,8m	153,6 lx
4m	Ø13m	86,4 lx
5m	Ø16,3m	55,3 lx
6m	Ø19,5m	38,4 lx

Ø1120mm