

DESCRIPTION

A lighting solution designed to combine performance, precision and character. LLOYD redefines technical lighting with a striking design, where every detail reflects Brilumen's commitment to excellence and aesthetic clarity. Available in various surface-mounted or ceiling-suspended installation options (with an indirect lighting option), compatible with 48V EVO low-voltage tracks as well as universal 3-circuit (230V) tracks, LLOYD adapts to the specific requirements of any architectural space. Defined by a quiet yet confident presence, LLOYD does not merely illuminate; it makes a statement. In the adjustable version for track mounting, its sculptural square shape and cluster of lenses lend character to the space, ensuring precise directional lighting.


MOUNTING	SALIENTE
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI / PUSH Dim, ON/OFF




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 174 lm/W
CRI	CRI->90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/F10
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

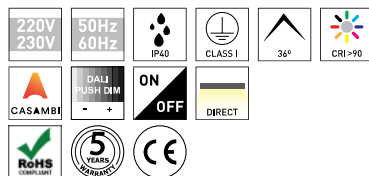

TECHNICAL DRAWING

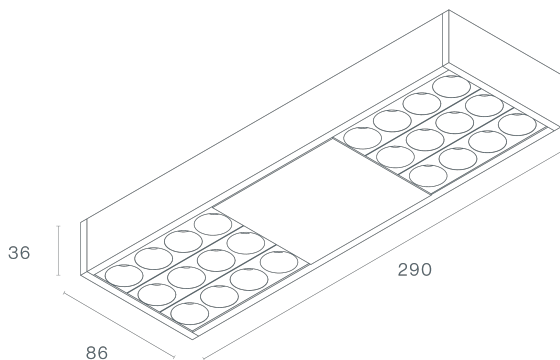

**LLOYD SPOTLIGHT 290MM
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
290	15	TB, TW	CS, DA, NF	14, 25, 36, 75	2464	2340	3000K	576XX.14.930.FI
290	15	TB, TW	CS, DA, NF	14, 25, 36, 75	2464	2340	3000K	576XX.25.930.FI
290	15	TB, TW	CS, DA, NF	14, 25, 36, 75	2464	2340	3000K	576XX.36.930.FI
290	15	TB, TW	CS, DA, NF	14, 25, 36, 75	2464	2340	3000K	576XX.75.930.FI
290	15	TB, TW	CS, DA, NF	14, 25, 36, 75	2614	2483	4000K	576XX.14.940.FI
290	15	TB, TW	CS, DA, NF	14, 25, 36, 75	2614	2483	4000K	576XX.25.940.FI
290	15	TB, TW	CS, DA, NF	14, 25, 36, 75	2614	2483	4000K	576XX.36.940.FI
290	15	TB, TW	CS, DA, NF	14, 25, 36, 75	2614	2483	4000K	576XX.75.940.FI

**SELECT YOUR PREFERRED
OPTION**

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	14°	14
DALI / PUSH Dim	DA	Textured White	TW	25°	25
ON/OFF	NF			36°	36
				75°	75