

DESCRIPTION

A lighting solution designed to combine performance, precision and character. LLOYD redefines technical lighting with a striking design, where every detail reflects Brilumen's commitment to excellence and aesthetic clarity. Available in various surface-mounted or suspended ceiling installation options (with an indirect lighting option), compatible with 48V EVO low-voltage tracks as well as 3-circuit (230V) universal tracks, LLOYD adapts to the specific requirements of any architectural space. Defined by a quiet yet confident presence, LLOYD does not merely illuminate; it makes a statement. In the adjustable version for track mounting, its sculptural square shape and cluster of lenses lend character to the space, ensuring precise directional lighting.

MOUNTING TYPE	CALHAS
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI / Switch Dim, ON/OFF




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 174 lm/W
CRI	CRI->90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/F10
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

ICONOGRAPHY

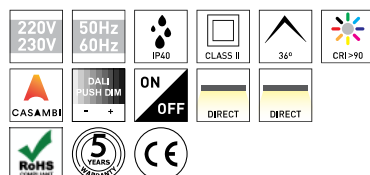

LLOYD ADJUSTABLE 230V
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
105	9.7	TB, TW	CS, DA, NF	14, 25, 36, 75	1584	1505	3000K	574XX.14.930.FI
105	9.7	TB, TW	CS, DA, NF	14, 25, 36, 75	1584	1505	3000K	574XX.25.930.FI
105	9.7	TB, TW	CS, DA, NF	14, 25, 36, 75	1584	1505	3000K	574XX.36.930.FI
105	9.7	TB, TW	CS, DA, NF	14, 25, 36, 75	1584	1505	3000K	574XX.75.930.FI
105	9.7	TB, TW	CS, DA, NF	14, 25, 36, 75	1680	1596	4000K	574XX.14.940.FI
105	9.7	TB, TW	CS, DA, NF	14, 25, 36, 75	1680	1596	4000K	574XX.25.940.FI
105	9.7	TB, TW	CS, DA, NF	14, 25, 36, 75	1680	1596	4000K	574XX.36.940.FI
105	9.7	TB, TW	CS, DA, NF	14, 25, 36, 75	1680	1596	4000K	574XX.75.940.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	14°	14
DALI / Switch Dim	DA	Textured White	TW	25°	25
ON/OFF	NF			36°	36
				75°	75