

DESCRIPTION

A lighting solution created to unite performance, precision, and personality. LLOYD redefines technical lighting with an impactful design, where every detail reflects Brilumen's commitment to excellence and aesthetic clarity. Available in multiple installation options surface-mounted or suspended ceiling (indirect light option available), and adaptable to low-voltage 48V EVO tracks as well as universal 3-circuit tracks (230V) LLOYD is engineered to meet the specific requirements of any architectural layout. Defined by silent confidence, LLOYD doesn't just light it defines. For application as a track light, the adjustable version, with a sculptural squared form and a clustered lens composition, adds character to any space while delivering precise, directional lighting.


MOUNTING TYPE	CALHAS
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI, ON/OFF



LED FEATURES

LUMINOUS EFFICIENCY	UP TO 174 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/F10
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

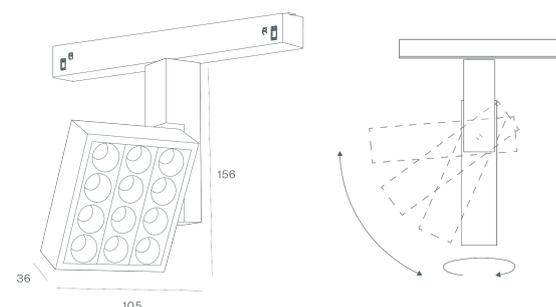

ICONOGRAPHY



**LLOYD ADJUSTABLE 48V EVO
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1584	1505	3000K	572XX.14.930.FI
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1584	1505	3000K	572XX.25.930.FI
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1584	1505	3000K	572XX.36.930.FI
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1584	1505	3000K	572XX.75.930.FI
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1584	1505	3000K	581XX.14.930.FI
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1584	1505	3000K	581XX.25.930.FI
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1584	1505	3000K	581XX.36.930.FI
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1584	1505	3000K	581XX.75.930.FI
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1680	1596	4000K	572XX.14.940.FI
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1680	1596	4000K	572XX.25.940.FI
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1680	1596	4000K	572XX.36.940.FI
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1680	1596	4000K	572XX.75.940.FI
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1680	1596	4000K	581XX.14.940.FI
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1680	1596	4000K	581XX.25.940.FI
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1680	1596	4000K	581XX.36.940.FI
105	9.7	TB, TW	CS, DL, NF	14, 25, 36, 75	1680	1596	4000K	581XX.75.940.FI

**SELECT YOUR PREFERRED
OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	14°	14
DALI	DL	Textured White	TW	25°	25
ON/OFF	NF			36°	36
				75°	75