

DESCRIPTION

A lighting solution designed to combine performance, precision and character. LLOYD redefines technical lighting with a striking design, where every detail reflects Brilumen's commitment to excellence and aesthetic clarity. Available in various surface-mounted or ceiling-suspended installation options (with an indirect lighting option), compatible with 48V EVO low-voltage tracks as well as universal 3-circuit (230V) tracks, LLOYD adapts to the specific requirements of any architectural space. Defined by a quiet yet confident presence, LLOYD does not merely illuminate; it makes a statement. In the adjustable version for track mounting, its sculptural square shape and cluster of lenses lend character to the space, ensuring precise directional lighting.

MOUNTING TYPE	Suspension
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI / Switch Dim, ON/OFF




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 174 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/F10
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

ICONOGRAPHY

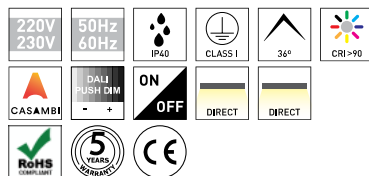

LLOYD SUSPENDED 1000MM  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1000	30	TB, TW	3000K	CS, DA, NF	4927	4681	578XX.14.930.FI
1000	30	TB, TW	3000K	CS, DA, NF	4927	4681	578XX.25.930.FI
1000	30	TB, TW	3000K	CS, DA, NF	4927	4681	578XX.36.930.FI
1000	30	TB, TW	3000K	CS, DA, NF	4927	4681	578XX.75.930.FI
1000	30	TB, TW	4000K	CS, DA, NF	5228	4966	578XX.14.940.FI
1000	30	TB, TW	4000K	CS, DA, NF	5228	4966	578XX.25.940.FI
1000	30	TB, TW	4000K	CS, DA, NF	5228	4966	578XX.36.940.FI
1000	30	TB, TW	4000K	CS, DA, NF	5228	4966	578XX.75.940.FI

SELECT YOUR PREFERRED  
OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
CASAMBI	CS	3000K	30	Textured Black	TB
DALI / Switch Dim	DA	4000K	40	Textured White	TW
ON/OFF	NF				