

DESCRIPTION

Brilumen is specialize in technical lighting, suitable for stores, supermarkets, shopping centres, art galleries, museums, restaurants, etc. In these places, lighting the product or areas correctly is fundamental to highlight all the details and get the customers attention. The Brilumen track lights are the ideal solution for highlighting products in any location. With this light fitting range, you can get the right luminous flux, an excellent colour temperature and a low UGR, maintaining controlled, the visual comfort, room temperature and energy costs. In addition, these track lights have an 80 or 95 CRI and are adjustable, allowing not only to adjust them whenever the place is changed, making it more dynamic, but also to easily guide the customers. The Brilumen track lights have already been used in countless lighting projects, such as commercial areas, museums, car dealerships, exhibitors in trade shows, etc.




|                    |                                |
|--------------------|--------------------------------|
| MOUNTING TYPE      | Uni Track                      |
| LIGHT DISTRIBUTION | Direct                         |
| POWER SUPPLY       | 220-230V / 50-60 Hz            |
| WARRANTY           | 2 Years                        |
| FINISHING          | Textured Black, Textured White |
| CONTROL            | ON/OFF                         |

LED FEATURES

|                      |                 |
|----------------------|-----------------|
| LUMINOUS EFFICIENCY  | UP TO 88 lm/W   |
| CRI                  | CRI→80, CRI→95  |
| LIFESPAN             | 50.000 Hours    |
| STEPS MACADAM        | 3 Steps MacAdam |
| LUMEN MAINTENANCE    | L90/B50         |
| PHOTOBIOLOGICAL RISK | RG1             |

ICONOGRAPHY

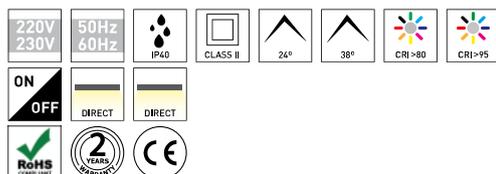

LORY 12W  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80

| LENGTH | POWER | FINISHING | CONTROL TYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE            |
|--------|-------|-----------|--------------|------------|------------|--------------|-------------|-----------------|
| 60     | 12    | TB, TW    | NF           | 24, 38     | 1056       | 975          | 2700K       | 442.80.BA.27.FI |
| 60     | 12    | TB, TW    | NF           | 24, 38     | 1056       | 975          | 3000K       | 442.80.BA.30.FI |
| 60     | 12    | TB, TW    | NF           | 24, 38     | 1056       | 975          | 4000K       | 442.80.BA.40.FI |

SELECT YOUR PREFERRED  
OPTION

| CONTROL TYPE | XX | FINISHING      | FI | BEAM ANGLE | BA |
|--------------|----|----------------|----|------------|----|
| ON/OFF       | NF | Textured Black | TB | 24°        | 24 |
|              |    | Textured White | TW | 38°        | 38 |



LORY 12W  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→95

| LENGTH | POWER | FINISHING | CONTROL TYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE            |
|--------|-------|-----------|--------------|------------|------------|--------------|-------------|-----------------|
| 60     | 12    | TB, TW    | NF           | 24, 38     | 840        | 775          | 2700K       | 442.95.BA.27.FI |
| 60     | 12    | TB, TW    | NF           | 24, 38     | 840        | 775          | 3000K       | 442.95.BA.30.FI |
| 60     | 12    | TB, TW    | NF           | 24, 38     | 840        | 775          | 4000K       | 442.95.BA.40.FI |

SELECT YOUR PREFERRED  
OPTION

| CONTROL TYPE | XX | FINISHING      | FI | BEAM ANGLE | BA |
|--------------|----|----------------|----|------------|----|
| ON/OFF       | NF | Textured Black | TB | 24°        | 24 |
|              |    | Textured White | TW | 38°        | 38 |

ACCESSORIES



|                          |             |
|--------------------------|-------------|
| Track ON/OFF Susp./Surf. |             |
| ON/OFF Track 1m Black    | UP1459429-1 |
| ON/OFF Track 1m White    | UP1459102-1 |
| ON/OFF Track 2m Black    | UP1459429   |
| ON/OFF Track 2m White    | UP1459102   |

|                        |             |
|------------------------|-------------|
| Track DALI Susp./Surf. |             |
| DALI Track 1m Black    | UP1459439-1 |



DALI Track 1m White  
DALI Track 2m Black  
DALI Track 2m White

UP1459107-1  
UP1459439  
UP1459107



Recess. Track ON/OFF  
ON/OFF Rec. Track 1m BL  
ON/OFF Rec. Track 1m WH  
ON/OFF Rec. Track 2m BL  
ON/OFF Rec. Track 2m WH

UP1459312-1  
UP1459112-1  
UP1459312  
UP1459112



Recessed Track DALI  
DALI Rec. Track 1m BL  
DALI Rec. Track 1m WH  
DALI Rec. Track 2m BL  
DALI Rec. Track 2m WH

UP1459317-1  
UP1459117-1  
UP1459317  
UP1459117