

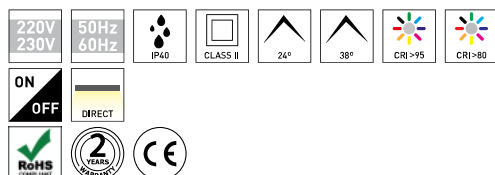
**DESCRIPTION**

Brilumen is specialize in technical lighting, suitable for stores, supermarkets, shopping centres, art galleries, museums, restaurants, etc. In these places, lighting the product or areas correctly is fundamental to highlight all the details and get the customers attention. The Brilumen track lights are the ideal solution for highlighting products in any location. With this light fitting range, you can get the right luminous flux, an excellent colour temperature and a low UGR, maintaining controlled, the visual comfort, room temperature and energy costs. In addition, these track lights have an 80 or 95 CRI and are adjustable, allowing not only to adjust them whenever the place is changed, making it more dynamic, but also to easily guide the customers. The Brilumen track lights have already been used in countless lighting projects, such as commercial areas, museums, car dealerships, exhibitors in trade shows, etc.

<b>MOUNTING</b>	Uni Track
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	2 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 88 lm/W
<b>CRI</b>	CRI→80, CRI→95
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**ICONOGRAPHY**

**LORY 12W**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
60	12	TB, TW	NF	24, 38	1056	975	2700K	442.80.BA.27.FI
60	12	TB, TW	NF	24, 38	1056	975	3000K	442.80.BA.30.FI
60	12	TB, TW	NF	24, 38	1056	975	4000K	442.80.BA.40.FI

**SELECT YOUR PREFERRED OPTION**

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
ON/OFF	NF	Textured Black	TB	24°	24
		Textured White	TW	38°	38


**LORY 12W**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→95**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
60	12	TB, TW	NF	24, 38	840	775	2700K	442.95.BA.27.FI
60	12	TB, TW	NF	24, 38	840	775	3000K	442.95.BA.30.FI
60	12	TB, TW	NF	24, 38	840	775	4000K	442.95.BA.40.FI

**SELECT YOUR PREFERRED OPTION**

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
ON/OFF	NF	Textured Black	TB	24°	24
		Textured White	TW	38°	38

**ACCESSORIES**



Track ON/OFF Susp./Surf.	
ON/OFF Track 1m Black	UP1459429-1
ON/OFF Track 1m White	UP1459102-1
ON/OFF Track 2m Black	UP1459429
ON/OFF Track 2m White	UP1459102

Track DALI Susp./Surf.	
DALI Track 1m Black	UP1459439-1



DALI Track 1m White  
DALI Track 2m Black  
DALI Track 2m White

UP1459107-1  
UP1459439  
UP1459107



Recess. Track ON/OFF  
ON/OFF Rec. Track 1m BL  
ON/OFF Rec. Track 1m WH  
ON/OFF Rec. Track 2m BL  
ON/OFF Rec. Track 2m WH

UP1459312-1  
UP1459112-1  
UP1459312  
UP1459112



Recessed Track DALI  
DALI Rec. Track 1m BL  
DALI Rec. Track 1m WH  
DALI Rec. Track 2m BL  
DALI Rec. Track 2m WH

UP1459317-1  
UP1459117-1  
UP1459317  
UP1459117