

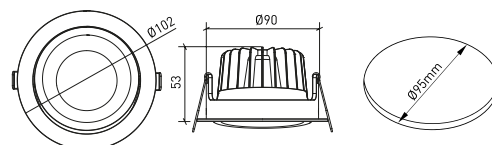
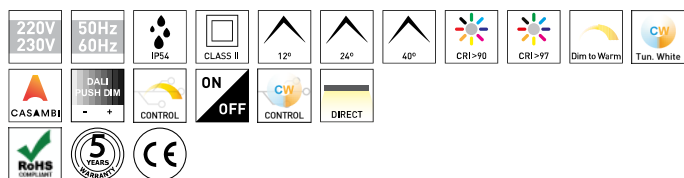
**DESCRIPTION**

MATISSE is a round downlight made of high quality aluminium, a textured white finish and a 5 year warranty, and has already been installed by customers in numerous architectural projects. This high-quality light fitting has a CRI higher than 90 and it's perfect to light hotels, museums, art galleries, apparel stores, etc. The reliability, finishing and portfolio, have transformed this light fitting into one of the best downlights on the market.

<b>MOUNTING</b>	Recessed
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	CASAMBI, DALI / PUSH Dim, Dim To Warm, ON/OFF, Tunable White


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 97 lm/W
<b>CRI</b>	CRI→90, CRI→97, Dim To Warm CRI→95, Tunable White CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**

**MATISSE DOWNLIGHT**  
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
102	11,4	TB, TW	CS, DA, NF	12, 24, 40	1637	1391	2700K	5304XX.BA.927.FI
102	11,4	TB, TW	CS, DA, NF	12, 24, 40	1671	1420	3000K	5304XX.BA.930.FI
102	11,4	TB, TW	CS, DA, NF	12, 24, 40	1785	1518	4000K	5304XX.BA.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI / PUSH Dim	DA	Textured White	TW	24°	24
ON/OFF	NF			40°	40


**MATISSE DOWNLIGHT**  
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
102	12,8	TB, TW	CS, DA, NF	12, 24, 40	1243	1056	2700K	5304XX.BA.9727.FI
102	12,8	TB, TW	CS, DA, NF	12, 24, 40	1319	1122	3000K	5304XX.BA.9730.FI
102	12,8	TB, TW	CS, DA, NF	12, 24, 40	1396	1187	4000K	5304XX.BA.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI / PUSH Dim	DA	Textured White	TW	24°	24
ON/OFF	NF			40°	40


**MATISSE DOWNLIGHT**  
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Dim To Warm CRI→95

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
102	11,8	TB, TW	DW	12, 24, 40	1148	975	Dim to Warm 1800k - 3000k	5304XX.BA.953018.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
Dim To Warm	DW	Textured Black	TB	12°	12
		Textured White	TW	24°	24
				40°	40



**MATISSE DOWNLIGHT**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
102	10,4	TB, TW	TU	12, 24, 40	1159	985	TunableWhite 2700k - 6500k	5304XX.BA.92765.FI

SELECT YOUR PREFERRED  
 OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
Tunable White	TU	Textured Black	TB	12°	12
		Textured White	TW	24°	24
				40°	40