

DESCRIPTION

Square, with white or black textured finish, the versatile MIRÓ is undoubtedly a downlight that all architects and designers should put in their projects. This light fitting is available with 36° or 60° beam angle, has a colour rendering index higher than 90 and is made of a noble and resistant aluminium alloy. It's perfect to be installed at houses, apparel and shoe stores, hotels, galleries and museums.


MOUNTING	Recessed
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White, Textured white and black
CONTROL	CASAMBI, DALI / PUSH Dim, ON/OFF




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 161 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

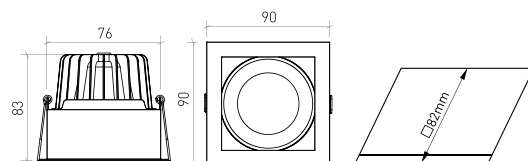

ICONOGRAPHY

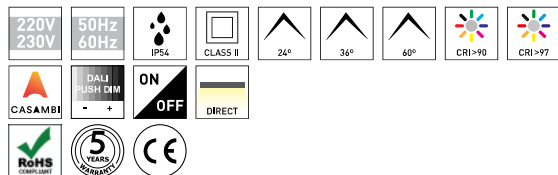

MIRÓ SQUARE DOWNLIGHT
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	8,1	TB, TW, TWB	CS, DA, NF	24, 36, 60	1203	1023	2700K	5328XX.BA.927.FI
90	8,1	TB, TW, TWB	CS, DA, NF	24, 36, 60	1244	1057	3000K	5328XX.BA.930.FI
90	8,1	TB, TW, TWB	CS, DA, NF	24, 36, 60	1300	1105	4000K	5328XX.BA.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	24°	24
DALI / PUSH Dim	DA	Textured White	TW	36°	36
ON/OFF	NF	Textured white and black	TWB	60°	60

MIRÓ SQUARE DOWNLIGHT
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	8,8	TB, TW, TWB	CS, DA, NF	24, 36, 60	918	780	2700K	5328XX.BA.9727.FI
90	8,8	TB, TW, TWB	CS, DA, NF	24, 36, 60	980	833	3000K	5328XX.BA.9730.FI
90	8,8	TB, TW, TWB	CS, DA, NF	24, 36, 60	1033	878	4000K	5328XX.BA.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	24°	24
DALI / PUSH Dim	DA	Textured White	TW	36°	36
ON/OFF	NF	Textured white and black	TWB	60°	60