

DESCRIPTION

One of the lighting trends is the trimless downlights, aluminium light fittings without trims, easy to install and perfect to recess in false ceilings. Brilumen introduces you this range of products, indented or with tube, suitable for ambient lighting of any room that requires discrete luminaires which do not change the ceiling aesthetics, but at the same time are modern with advanced technology, and effectively illuminate the entire environment. Eridane, Spitzer, Monet & Hubble are available on ON-OFF and dimmable 0-10V mode, are compatible with the DALI system and have a high colour rendering index as well as an excellent textured white finish.


MOUNTING	Recessed
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured White
CONTROL	CASAMBI, DALI / PUSH Dim, Dim To Warm, ON/OFF, Tunable White




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 97 lm/W
CRI	CRI→90, CRI→97, Dim To Warm CRI→95, Tunable White CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

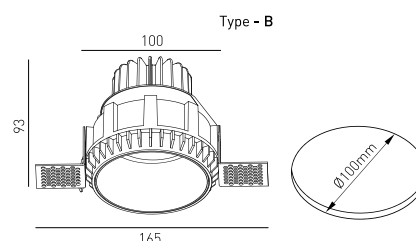

ICONOGRAPHY

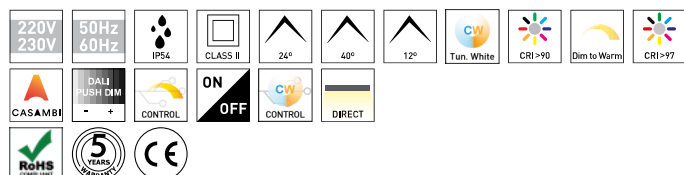

MONET TRIMLESS TYPE B  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
100	11,4	TW	CS, DA, NF	12, 24, 40	1637	1391	2700K	5341XX.BA.927.FI
100	11,4	TW	CS, DA, NF	12, 24, 40	1671	1420	3000K	5341XX.BA.930.FI
100	11,4	TW	CS, DA, NF	12, 24, 40	1785	1518	4000K	5341XX.BA.940.FI

SELECT YOUR PREFERRED  
OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	12°	12
DALI / PUSH Dim	DA			24°	24
ON/OFF	NF			40°	40



MONET TRIMLESS TYPE B  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
100	12,8	TW	CS, DA, NF	12, 24, 40	1243	1056	2700K	5341XX.BA.9727.FI
100	12,8	TW	CS, DA, NF	12, 24, 40	1319	1122	3000K	5341XX.BA.9730.FI
100	12,8	TW	CS, DA, NF	12, 24, 40	1396	1187	4000K	5341XX.BA.9740.FI

SELECT YOUR PREFERRED  
OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured White	TW	12°	12
DALI / PUSH Dim	DA			24°	24
ON/OFF	NF			40°	40


**MONET TRIMLESS TYPE B**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Dim To Warm CRI→95**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
100	11,8	TW	DW	12, 24, 40	1148	975	Dim to Warm 1800k - 3000k	5341XX.BA.953018.FI

SELECT YOUR PREFERRED  
OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
Dim To Warm	DW	Textured White	TW	12°	12
				24°	24
				40°	40


**MONET TRIMLESS TYPE B**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI→90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
100	10,4	TW	TU	12, 24, 40	1159	985	TunableWhite 2700k - 6500k	5341XX.BA.92765.FI

SELECT YOUR PREFERRED  
OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
Tunable White	TU	Textured White	TW	12°	12
				24°	24
				40°	40