

**DESCRIPTION**


NAM – Lighting with identity and lightness The NAM luminaire, with a contemporary design and extremely compact dimensions, features a delicate conical shape, offering a discreet yet visually striking lighting solution. Compatible with 48V MICRO and EVO lowvoltage track systems, NAM can also be installed independently as a suspended fixture, with either a recessed or surfacemounted ceiling box. An ideal proposal for projects that value detail, formal lightness, and installation flexibility.

<b>MOUNTING</b>	48V EVO TRACK
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	48V / TRACK
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	CASAMBI, DALI, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 153 lm/W
<b>CRI</b>	CRI->90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**ICONOGRAPHY**



**TECHNICAL DRAWING**

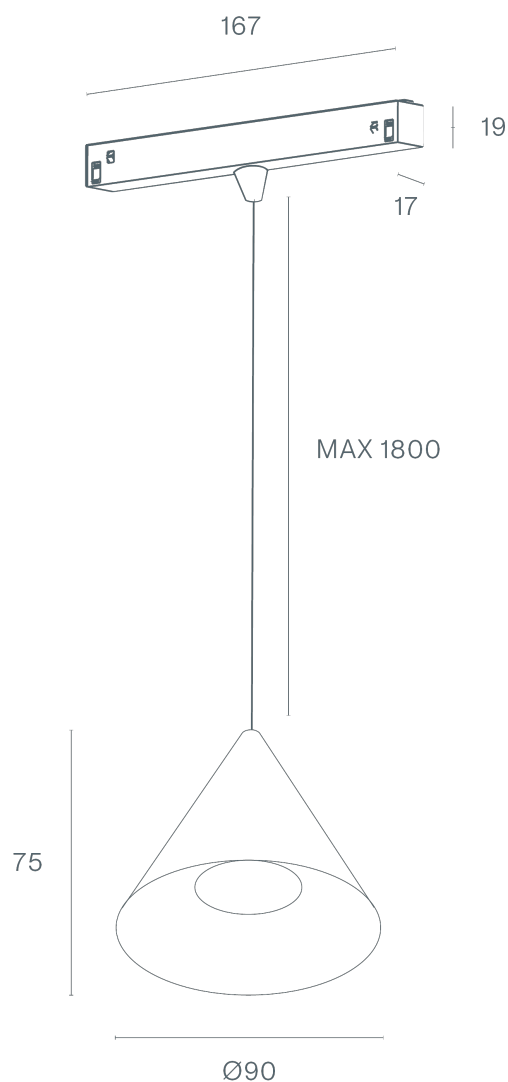







**NAM 48V EVO**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
75	6	TB, TW	CS, DL, NF	36	821	698	2700K	554XX.36.927.FI
75	6	TB, TW	CS, DL, NF	36	857	728	3000K	554XX.36.930.FI
75	6	TB, TW	CS, DL, NF	36	910	774	4000K	554XX.36.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	36°	36
DALI	DL	Textured White	TW		
ON/OFF	NF				

ACCESSORIES

	<p>BT15E - Track 48V EVO            Track 48V EVO 1M            Track 48V EVO 2M</p>	<p>White                  Black            3080-0227E.WH 3080-0227E.BL            3080-0228E.WH 3080-0228E.BL</p>
	<p>BT1E - Track 48V EVO            Track 48V EVO 1M            Track 48V EVO 2M</p>	<p>White                  Black            3080-0175E.WH 3080-0175E.BL            3080-0176E.WH 3080-0176E.BL</p>
	<p>BT2E - Track 48V EVO            Track 48V EVO 1M            Track 48V EVO 2M</p>	<p>White                  Black            3080-0177E.WH 3080-0177E.BL            3080-0178E.WH 3080-0178E.BL</p>
	<p>TK18E - Track 48V EVO            Track 48V EVO 1M            Track 48V EVO 2M</p>	<p>White                  Black            3080-0231E.WH 3080-0231E.BL            3080-0232E.WH 3080-0232E.BL</p>
	<p>TK5E - Track 48V EVO            Track 48V EVO 1M            Track 48V EVO 2M</p>	<p>White                  Black            3080-0250E.WH 3080-0250E.BL            3080-0251E.WH 3080-0251E.BL</p>
	<p>TK9E - Track 48V EVO            Track 48V EVO 1M            Track 48V EVO 2M</p>	<p>White                  Black            3080-0211E.WH 3080-0211E.BL            3080-0212E.WH 3080-0212E.BL</p>