

DESCRIPTION

NAM – Lighting with identity and lightness The NAM luminaire, with a contemporary design and extremely compact dimensions, features a delicate conical shape, offering a discreet yet visually striking lighting solution. Compatible with 48V MICRO and EVO lowvoltage track systems, NAM can also be installed independently as a suspended fixture, with either a recessed or surfacemounted ceiling box. An ideal proposal for projects that value detail, formal lightness, and installation flexibility.

MOUNTING TYPE **48V EVO TRACK** LIGHT DISTRIBUTION Direct **POWER SUPPLY** 48V / TRACK WARRANTY 5 Years

FINISHING Textured Black, Textured White CASAMBI, DALÍ, ON/OFF CONTROL

LED FEATURES


LUMINOUS EFFICIENCY UP TO 153 lm/W CRI CRI→90 LIFESPAN 50.000 Hours STEPS MACADAM 3 Steps MacAdam LUMEN MAINTENANCE L90/B50 PHOTOBIOLOGICAL RISK RG1

ICONOGRAPHY





TECHNICAL DRAWING

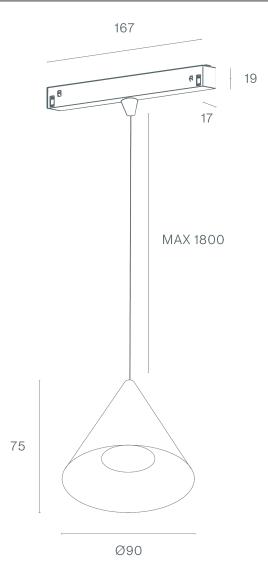



PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

CRI-70										
			FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.		
	75	6	TB, TW	CS, DL, NF	36	821	698	2700K	554XX.36.927.FI	
	75	6	TB, TW	CS, DL, NF	36	857	728	3000K	554XX.36.930.FI	
	75	6	TB, TW	CS, DL, NF	36	910	774	4000K	554XX.36.940.FI	

SELECT YOUR PREFERRED	
OPTION	
	_

CONTROL TYPE	XX
CASAMBI	CS
DALI	DL
ON/OFF	NE

FINISHING	FI	BEAM ANGLE	ВА
Textured Black	TB	36°	36
Textured White	TW		



BRILUMEN - PRODUTOS ELÉCTRICOS, LDA

Rua de Oliveira e Sá, Nr. 200

2 www.brilumen.com