

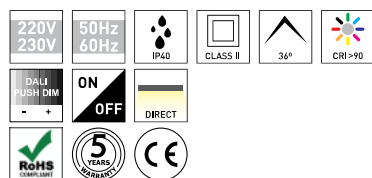
DESCRIPTION

NAM – Lighting with identity and lightness The NAM luminaire, with a contemporary design and extremely compact dimensions, features a delicate conical shape, offering a discreet yet visually striking lighting solution. Compatible with 48V MICRO and EVO lowvoltage track systems, NAM can also be installed independently as a suspended fixture, with either a recessed or surfacemounted ceiling box. An ideal proposal for projects that value detail, formal lightness, and installation flexibility.

MOUNTING TYPE	Suspension
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	DALI / Switch Dim, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 153 lm/W
CRI	CRI->90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING
ICONOGRAPHY

**NAM RECESSED SPOTLIGHT
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
75	6	TB, TW	DA, NF	36	821	698	2700K	556XX.36.927.FI
75	6	TB, TW	DA, NF	36	857	728	3000K	556XX.36.930.FI
75	6	TB, TW	DA, NF	36	910	774	4000K	556XX.36.940.FI

**SELECT YOUR PREFERRED
OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI / Switch Dim	DA	Textured Black	TB	36°	36
ON/OFF	NF	Textured White	TW		

ACCESSORIES

	Power Cable 1M	Textured White	Textured Black
	Power Cable 1M	30800240.TW	30800240.TB
	Power Cable 1,5M	Textured White	Textured Black
	Power Cable 1,5M	30800241.TW	30800241.TB