

DESCRIPTION


A circle is the reflection of eternity, it has no beginning and it has no end. Brilumen proudly presents our new range of circular LED luminaires. With a 5 Year Warranty Olympia is designed and inspired to deliver one continuous and seamless line of light. With an internal driver, different wattages, diameters and mounting types, these circular profiles can be easily applied in numerous locations, such as stores, cinemas, museums, galleries, hotels, restaurants, meeting rooms, offices, lounges, etc. The Olympia LED circular profile can also be configured with the options of ON-OFF, DALI and CASAMBI. Other dimmable options are as well available on request. Brilumen has also available the IES and LDT files for DIALux projects, providing technical assistance during lighting projects.

MOUNTING TYPE	Suspension
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured Silver, Textured White
CONTROL	DALI / Switch Dim, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 191 lm/W
CRI	CRI→80
LIFESPAN	40.000 Hours Tp 55°
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/F10
PHOTOBIOLOGICAL RISK	RG0

ICONOGRAPHY

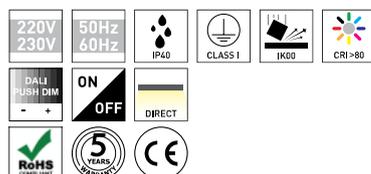

TECHNICAL DRAWING



OLYMPIA SUSPENDEDO
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - OPAL

DIAMETER	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
620	41	TB, TS, TW	3000K	DA, NF	7320	6149	180XX.0609.8CT.FI
620	41	TB, TS, TW	4000K	DA, NF	7800	6552	180XX.0609.8CT.FI
920	62	TB, TS, TW	3000K	DA, NF	10980	9125	180XX.0909.8CT.FI
920	62	TB, TS, TW	4000K	DA, NF	11700	9723	180XX.0909.8CT.FI
1220	82	TB, TS, TW	3000K	DA, NF	14640	12152	180XX.1209.8CT.FI
1220	82	TB, TS, TW	4000K	DA, NF	15600	12948	180XX.1209.8CT.FI
1520	109	TB, TS, TW	3000K	DA, NF	19520	16261	180XX.1509.8CT.FI
1520	109	TB, TS, TW	4000K	DA, NF	20800	17327	180XX.1509.8CT.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW


OLYMPIA SUSPENDED
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - PRISMATIC

DIAMETER	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
620	41	TB, TS, TW	3000K	DA, NF	7320	6831	180XX.06P8.8CT.FI
620	41	TB, TS, TW	4000K	DA, NF	7800	7279	180XX.06P8.8CT.FI
920	62	TB, TS, TW	3000K	DA, NF	10980	10070	180XX.09P8.8CT.FI
920	62	TB, TS, TW	4000K	DA, NF	11700	10730	180XX.09P8.8CT.FI
1220	82	TB, TS, TW	3000K	DA, NF	14640	13452	180XX.12P8.8CT.FI
1220	82	TB, TS, TW	4000K	DA, NF	15600	14334	180XX.12P8.8CT.FI
1520	109	TB, TS, TW	3000K	DA, NF	19520	18155	180XX.15P8.8CT.FI
1520	109	TB, TS, TW	4000K	DA, NF	20800	19345	180XX.15P8.8CT.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Textured Black	TB
ON/OFF	NF	4000K	40	Textured Silver	TS
				Textured White	TW

ACCESSORIES

Suspension Kit	Silver
Suspension kit 1,5m (1un)	80303017.SL
Suspension kit 3 m (1un)	80303018.SL
Suspension kit 5 m (1un)	80303019.SL

Recessed power box 200mm	120mm
Textured Black	50041023.TB
Textured Silver	50041023.TS
Textured white	50041023.TW

Ceiling Rose Surf. 120mm	120mm
Textured Black	50041024.TB
Textured Silver	50041024.TS
Textured white	50041024.TW

Power Cable 0,75	ON/Off	DALI Push
Power Cable 1.5m	80303001	80303004
Power Cable 3m	80303002	80303005
Power Cable 5m	80303003	80303006


Surface ceiling box 120mm	120mm
120mm surface box TB	50041025.TB
120mm surface box TS	50041025.TS
120mm surface box TW	50041025.TW

Surface ceiling box 200mm	200mm
200mm surface box TB	50041027.TB
200mm surface box TS	50041027.TS
200mm surface box TW	50041027.TW

CASAMBI - DALI Interface	CASAMBI
CASAMBI - DALI Interface	8030-2590

PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS OPAL

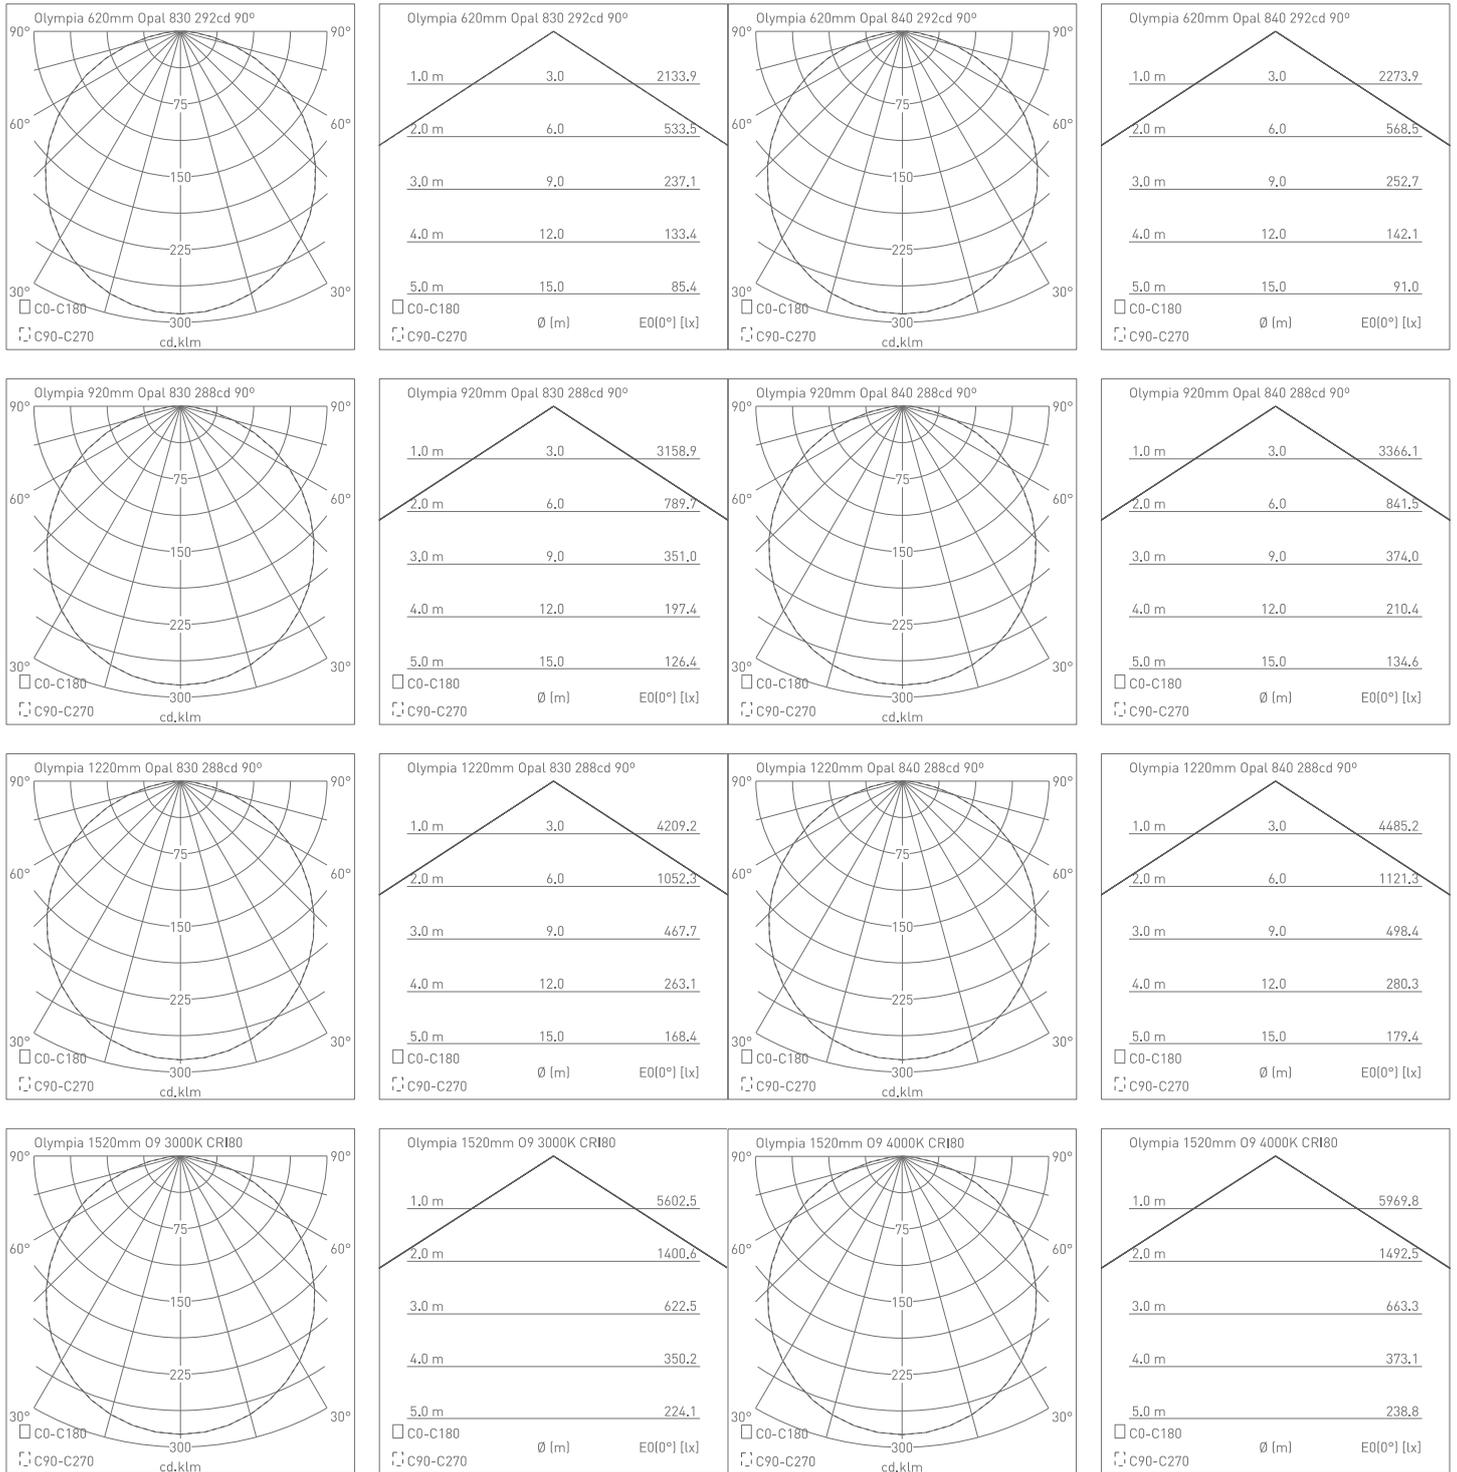

PHOTOMETRIC DATA

POLAR DIAGRAM AND LUMINOUS FLUX - LENS PRISMATIC

