

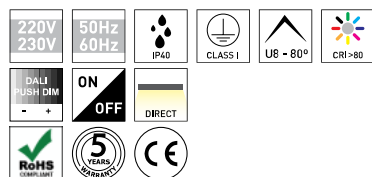
**DESCRIPTION**
**ORIS 50 VE Recessed LINEAR SYSTEM MICROPRISMATIC CRI→80**

<b>MOUNTING</b>	<b>ENCASTRAR</b>
<b>DISTRIBUICAOLUZ</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Anodized aluminium, Textured Black, Textured White
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 190 lm/W
<b>CRI</b>	CRI→80
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1


**TECHNICAL DRAWING**

**ICONOGRAPHY**

**ORIS 50 VE REC. LS MICPR**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	22.4	AL, TB, TW	3000K	DA, NF	4054	3244	561XX.11P8.830.FI
1130	22.4	AL, TB, TW	4000K	DA, NF	4256	3405	561XX.11P8.840.FI
1410	28	AL, TB, TW	3000K	DA, NF	5068	4054	561XX.14P8.830.FI
1410	28	AL, TB, TW	4000K	DA, NF	5320	4256	561XX.14P8.840.FI
1690	33.6	AL, TB, TW	3000K	DA, NF	6082	4865	561XX.16P8.830.FI
1690	33.6	AL, TB, TW	4000K	DA, NF	6384	5107	561XX.16P8.840.FI
1970	39.2	AL, TB, TW	3000K	DA, NF	7095	5676	561XX.19P8.830.FI
1970	39.2	AL, TB, TW	4000K	DA, NF	7448	5958	561XX.19P8.840.FI
2250	44.8	AL, TB, TW	3000K	DA, NF	8109	6487	561XX.22P8.830.FI
2250	44.8	AL, TB, TW	4000K	DA, NF	8512	6810	561XX.22P8.840.FI
2530	50.4	AL, TB, TW	3000K	DA, NF	9122	7298	561XX.25P8.830.FI
2530	50.4	AL, TB, TW	4000K	DA, NF	9576	7661	561XX.25P8.840.FI
2810	56	AL, TB, TW	3000K	DA, NF	10136	8109	561XX.28P8.830.FI
2810	56	AL, TB, TW	4000K	DA, NF	10640	8512	561XX.28P8.840.FI
3090	61.6	AL, TB, TW	3000K	DA, NF	11150	8920	561XX.30P8.830.FI
3090	61.6	AL, TB, TW	4000K	DA, NF	11704	9363	561XX.30P8.840.FI

**SELECT YOUR PREFERRED OPTION**

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW

**ACCESSORIES**
**Joint ON/OFF ORIS 50**      **ON/OFF**  
**Joint ON/OFF ORIS 50**      **80303071**
**Joint DALI ORIS 50**      **DALI**  
**Joint DALI ORIS 50**      **80303073**