
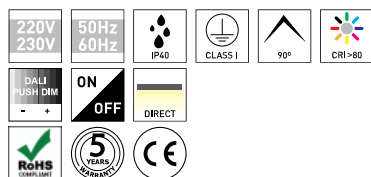


DESCRIPTION
ORIS 50 VE Recessed LINEAR SYSTEM OPAL CRI→80

MOUNTING	ENCASTRAR
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	DALI / PUSH Dim, ON/OFF


LED FEATURES


LUMINOUS EFFICIENCY	UP TO 186 lm/W
CRI	CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING
ICONOGRAPHY

ORIS 50 VE REC. LS OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	27,2	AL, TB, TW	3000K	DA, NF	4821	3520	561XX.1109.830.FI
1130	27,2	AL, TB, TW	4000K	DA, NF	5067	3699	561XX.1109.840.FI
1410	34,1	AL, TB, TW	3000K	DA, NF	6027	4400	561XX.1409.830.FI
1410	34,1	AL, TB, TW	4000K	DA, NF	6333	4623	561XX.1409.840.FI
1690	40,9	AL, TB, TW	3000K	DA, NF	7232	5280	561XX.1609.830.FI
1690	40,9	AL, TB, TW	4000K	DA, NF	7600	5548	561XX.1609.840.FI
1970	47,7	AL, TB, TW	3000K	DA, NF	8438	6159	561XX.1909.830.FI
1970	47,7	AL, TB, TW	4000K	DA, NF	8867	6473	561XX.1909.840.FI
2250	54,5	AL, TB, TW	3000K	DA, NF	9643	7039	561XX.2209.830.FI
2250	54,5	AL, TB, TW	4000K	DA, NF	10133	7397	561XX.2209.840.FI
2530	61,3	AL, TB, TW	3000K	DA, NF	10848	7919	561XX.2509.830.FI
2530	61,3	AL, TB, TW	4000K	DA, NF	11400	8322	561XX.2509.840.FI
2810	68,1	AL, TB, TW	3000K	DA, NF	12054	8799	561XX.2809.830.FI
2810	68,1	AL, TB, TW	4000K	DA, NF	12667	9247	561XX.2809.840.FI
3090	74,9	AL, TB, TW	3000K	DA, NF	13259	9679	561XX.3009.830.FI
3090	74,9	AL, TB, TW	4000K	DA, NF	13933	10171	561XX.3009.840.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / PUSH Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW

ACCESSORIES

Joint ON/OFF ORIS 50 **ON/OFF**
Joint ON/OFF ORIS 50 **80303071**

Joint DALI ORIS 50 **DALI**
Joint DALI ORIS 50 **80303073**