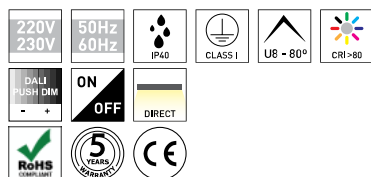


**DESCRIPTION**
**ORIS 50 VE Surface LINEAR SYSTEM MICROPRISMATIC CRI→80**

<b>MOUNTING</b>	<b>SALIENTE</b>
<b>DISTRIBUICAOLUZ</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Anodized aluminium, Textured Black, Textured White
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF


**LED FEATURES**


<b>LUMINOUS EFFICIENCY</b>	UP TO 190 lm/W
<b>CRI</b>	CRI→80
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**
**ICONOGRAPHY**

**ORIS 50 VE SURF. LS MICPR**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	22.4	AL, TB, TW	3000K	DA, NF	4054	3244	560XX.11P8.830.FI
1130	22.4	AL, TB, TW	4000K	DA, NF	4256	3405	560XX.11P8.840.FI
1410	28	AL, TB, TW	3000K	DA, NF	5068	4054	560XX.14P8.830.FI
1410	28	AL, TB, TW	4000K	DA, NF	5320	4256	560XX.14P8.840.FI
1690	33.6	AL, TB, TW	3000K	DA, NF	6082	4865	560XX.16P8.830.FI
1690	33.6	AL, TB, TW	4000K	DA, NF	6384	5107	560XX.16P8.840.FI
1970	39.2	AL, TB, TW	3000K	DA, NF	7095	5676	560XX.19P8.830.FI
1970	39.2	AL, TB, TW	4000K	DA, NF	7448	5958	560XX.19P8.840.FI
2250	44.8	AL, TB, TW	3000K	DA, NF	8109	6487	560XX.22P8.830.FI
2250	44.8	AL, TB, TW	4000K	DA, NF	8512	6810	560XX.22P8.840.FI
2530	50.4	AL, TB, TW	3000K	DA, NF	9122	7298	560XX.25P8.830.FI
2530	50.4	AL, TB, TW	4000K	DA, NF	9576	7661	560XX.25P8.840.FI
2810	56	AL, TB, TW	3000K	DA, NF	10136	8109	560XX.28P8.830.FI
2810	56	AL, TB, TW	4000K	DA, NF	10640	8512	560XX.28P8.840.FI
3090	61.6	AL, TB, TW	3000K	DA, NF	11150	8920	560XX.30P8.830.FI
3090	61.6	AL, TB, TW	4000K	DA, NF	11704	9363	560XX.30P8.840.FI

**SELECT YOUR PREFERRED OPTION**

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW

**ACCESSORIES**

**Oris 50 Trimless Aces.** -  
**Oris 50 Trimless Aces.** 8030-1400.2000

**Plaster KIT 4 a 5 cm** 4 - 5cm  
**Plaster KIT 4 a 5 cm** 80303058

**Plaster KIT 0,7 a 2 cm** 0.7 - 2.1cm  
**Plaster KIT 0,7 a 2 cm** 80303059



Joint ON/OFF ORIS 50  
Joint ON/OFF ORIS 50

ON/OFF  
80303071



Joint DALI ORIS 50  
Joint DALI ORIS 50

DALI  
80303073