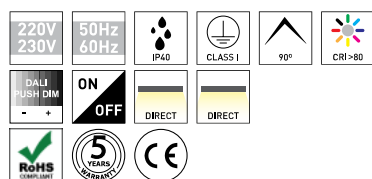


DESCRIPTION
ORIS 50 VE Surface LINEAR SYSTEM OPAL CRI→80

MOUNTING TYPE	SALIENTE
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	DALI / Switch Dim, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 186 lm/W
CRI	CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING
ICONOGRAPHY

ORIS 50 VE SURF. LS OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
1130	27.2	AL, TB, TW	3000K	DA, NF	4821	3520	560XX.1109.830.FI
1130	27.2	AL, TB, TW	4000K	DA, NF	5067	3699	560XX.1109.840.FI
1410	34.1	AL, TB, TW	3000K	DA, NF	6027	4400	560XX.1409.830.FI
1410	34.1	AL, TB, TW	4000K	DA, NF	6333	4623	560XX.1409.840.FI
1690	40.9	AL, TB, TW	3000K	DA, NF	7232	5280	560XX.1609.830.FI
1690	40.9	AL, TB, TW	4000K	DA, NF	7600	5548	560XX.1609.840.FI
1970	47.7	AL, TB, TW	3000K	DA, NF	8438	6159	560XX.1909.830.FI
1970	47.7	AL, TB, TW	4000K	DA, NF	8867	6473	560XX.1909.840.FI
2250	54.5	AL, TB, TW	3000K	DA, NF	9643	7039	560XX.2209.830.FI
2250	54.5	AL, TB, TW	4000K	DA, NF	10133	7397	560XX.2209.840.FI
2530	61.3	AL, TB, TW	3000K	DA, NF	10848	7919	560XX.2509.830.FI
2530	61.3	AL, TB, TW	4000K	DA, NF	11400	8322	560XX.2509.840.FI
2810	68.1	AL, TB, TW	3000K	DA, NF	12054	8799	560XX.2809.830.FI
2810	68.1	AL, TB, TW	4000K	DA, NF	12667	9247	560XX.2809.840.FI
3090	74.9	AL, TB, TW	3000K	DA, NF	13259	9679	560XX.3009.830.FI
3090	74.9	AL, TB, TW	4000K	DA, NF	13933	10171	560XX.3009.840.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / Switch Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW

ACCESSORIES

	Oris 50 Trimless Aces.	-
	Oris 50 Trimless Aces.	8030-1400.2000

	Plaster KIT 4 a 5 cm	4 - 5cm
	Plaster KIT 4 a 5 cm	80303058

	Plaster KIT 0,7 a 2 cm	0.7 - 2.1cm
	Plaster KIT 0,7 a 2 cm	80303059



Joint ON/OFF ORIS 50
Joint ON/OFF ORIS 50

ON/OFF
80303071



Joint DALI ORIS 50
Joint DALI ORIS 50

DALI
80303073