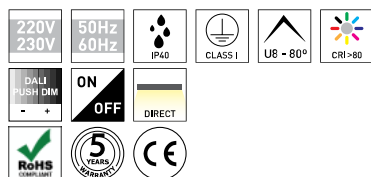


DESCRIPTION
ORIS 50 VE Surface MICROPRISMATIC CRI→80

MOUNTING	SALIENTE
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	DALI / PUSH Dim, ON/OFF


LED FEATURES


LUMINOUS EFFICIENCY	UP TO 190 lm/W
CRI	CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING
ICONOGRAPHY

ORIS 50 VE SURF MICROPRIS
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
850	16,8	AL, TB, TW	3000K	DA, NF	3041	2433	557XX.08P8.830.FI
850	16,8	AL, TB, TW	4000K	DA, NF	3192	2554	557XX.08P8.840.FI
1130	22,4	AL, TB, TW	3000K	DA, NF	4054	3244	557XX.11P8.830.FI
1130	22,4	AL, TB, TW	4000K	DA, NF	4256	3405	557XX.11P8.840.FI
1410	28	AL, TB, TW	3000K	DA, NF	5068	4054	557XX.14P8.830.FI
1410	28	AL, TB, TW	4000K	DA, NF	5320	4256	557XX.14P8.840.FI
1690	33,6	AL, TB, TW	3000K	DA, NF	6082	4865	557XX.16P8.830.FI
1690	33,6	AL, TB, TW	4000K	DA, NF	6384	5107	557XX.16P8.840.FI
1970	39,2	AL, TB, TW	3000K	DA, NF	7095	5676	557XX.19P8.830.FI
1970	39,2	AL, TB, TW	4000K	DA, NF	7448	5958	557XX.19P8.840.FI
2250	44,8	AL, TB, TW	3000K	DA, NF	8109	6487	557XX.22P8.830.FI
2250	44,8	AL, TB, TW	4000K	DA, NF	8512	6810	557XX.22P8.840.FI
2530	50,4	AL, TB, TW	3000K	DA, NF	9122	7298	557XX.25P8.830.FI
2530	50,4	AL, TB, TW	4000K	DA, NF	9576	7661	557XX.25P8.840.FI
2810	56	AL, TB, TW	3000K	DA, NF	10136	8109	557XX.28P8.830.FI
2810	56	AL, TB, TW	4000K	DA, NF	10640	8512	557XX.28P8.840.FI
3090	61,6	AL, TB, TW	3000K	DA, NF	11150	8920	557XX.30P8.830.FI
3090	61,6	AL, TB, TW	4000K	DA, NF	11704	9363	557XX.30P8.840.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	COLOR TEMP.	CT	FINISHING	FI
DALI / PUSH Dim	DA	3000K	30	Anodized aluminium	AL
ON/OFF	NF	4000K	40	Textured Black	TB
				Textured White	TW

ACCESSORIES


Oris 50 Trimless Aces. -
 Oris 50 Trimless Aces. 8030-1400.2000



Plaster KIT 4 a 5 cm 4 - 5cm
 Plaster KIT 4 a 5 cm 80303058



Plaster KIT 0,7 a 2 cm 0.7 - 2.1cm
 Plaster KIT 0,7 a 2 cm 80303059

